

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)



The
Patent
Office

PCT/GB 99/00550
09/623281

GB99/550



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales

NP9 1RH	
REC'D 08 APR 1999	
WIPO	PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

24 MAR 1999

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

THIS PAGE BLANK (USPTO)

Patents Act 1977
(Rule 16)

**Patent
Office**

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form.)

03MAR98 E342501-1 D02848

P01/7700 25.00 - 98044126 Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

P30524GB

2. Patent application number

(The Patent Office will fill in this part)

3 MAR 1998

9804412.6

3. Full name, address and postcode of the or of each applicant (underline all surnames)

University of Sheffield
Mappin Street
Sheffield
S1 3JD

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

7074917001.

UK

0891242001

4. Title of the invention

Nonlinear System, Method of Design
thereof in the Frequency Domain and
Computer Program Product

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom
to which all correspondence should be sent
(including the postcode)

DIBB LUPTON ALSOP

FOUNTAIN PRECINCT
BALM GREEN
SHEFFIELD
S1 1RZ

Patents ADP number (if you know it)

5617733004

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

03-03-98 12:30

+01142730312

P.05

R-273

Job-835

03-03-98 12:26 From:DIBB LUPTON ALSOP PATENT & TRADE MARKS

+01142730

T-807 P.05

Job-082

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description

Claim(s)

Abstract

Drawing(s)

0

42 ✓

10 ✓

1 ✓

2.6 ✓

10. If you are also filing any of the following, state how many of each item.

Priority documents

0

Translations of priority documents

0

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

1

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

0

Any other documents
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature *Abb Lupton Alsop*

Date 3.3.98

DIBB LUPTON ALSOP

2 March 1998

12. Name and daytime telephone number of person to contact in the United Kingdom

Harry Hutchinson

0113 283 3264

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

Nonlinear System, Method of Design thereof in the Frequency Domain and Computer Program Product

The present invention relates to non-linear systems, methods of design thereof in the frequency domain and computer program products. More particularly, the present invention relates to a non-linear system having pre-determinable frequency response characteristics. The invention can be utilised to design and realise, for example, nonlinear filters having a required frequency response or transfer functions having specified transfer characteristics or within a control system context.

The possible frequency components in an output signal of a linear system are exactly the same as the frequency components of a corresponding input signal. Conventional linear filter design is based on the principle that energy in unwanted frequency bands is attenuated.

The Dolby filter, which varies the amplitude of the output signal as a function of the level and frequency of the input, is an example of a nonlinear filter system. However, when compared with the input, the output does not contain any additional frequency components. Modulation is another concept related to nonlinear filtering, which is associated with signal transmission where the signal to be transmitted is modulated by a carrier signal and then transmitted through a medium. Although a modulation device allows energy to be moved from one frequency band to another, the output frequency components of such a device depend not only on the input components but mainly on the carrier signal. Therefore, the energy transfer implemented by modulation is realised by a two input and one output system where one input is the carrier signal and the other input is the signal to be processed.

The prior art lacks a non-linear system and method of/apparatus for the design of such a non-linear system for predictably transferring energy from one frequency or band of frequencies of an input signal to another frequency or band of frequencies independently of any other input signal. Further, the prior art lacks a non-linear control system which can predictably transfer energy from one frequency band to another frequency band.

It is an object of the present invention to at least mitigate some of the problems of the prior art.

Accordingly, a first aspect of the present invention provides a method for designing a non-linear system for transferring energy from an input signal having a first spectrum at a first pre-determinable frequency or range of

frequencies to an output signal having a second spectrum at a second pre-determinable frequency or range of frequencies.

Preferably, the method comprises the steps of identifying the first spectrum of the input signal from which energy is to be transferred, specifying the second spectrum of the output signal to which said energy is to be transferred, and calculating, using a frequency domain description of said output spectrum expressed in terms of a frequency domain description of said input signal and coefficients of a time domain description of a generalised non-linear system, the coefficients of a said time domain description of said generalised non-linear system in order to give effect to the energy transfer.

Advantageously, the present invention allows energy at a particular frequency within a given system to be transferred to another frequency or band of frequencies at which the response of the system is greatly reduced or negligible, or allows energy of a signal which is transmitted at a particular frequency or band of frequencies to be transferred, without using an additional modulating signal, to another frequency or band of frequencies at which the associated transmission media allows signals to pass, or allows energy at a particular band of frequencies to be transferred and spread over a new wider range of frequencies so as to attenuate the energy by employing the desired interkernel and intrakernel effects of nonlinear systems.

The present invention is based upon the relationship between the input and output spectra or frequency components of nonlinear systems, and the relationship between the input and output frequencies and/or frequency ranges in the nonlinear case. In addition, the invention utilises a mapping between the time and frequency domains which allows the output spectra or frequency content of nonlinear systems to be described completely by the coefficients of time domain models which represent the filter or non-linear system to be constructed.

A second aspect of the present invention provides a method for manufacturing a non-linear system for transferring energy from an input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to an output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said method of manufacture comprising the steps of

(a) designing said non-linear system comprising the steps of

identifying the first spectrum of the input signal from which energy is to be transferred,

specifying the second spectrum of the output signal to which said energy is to be transferred, and

calculating, using a frequency domain description of said output spectrum expressed in terms of a frequency domain description of said input signal and coefficients of a time domain description of a generalised non-linear system, the coefficients of a said time domain description of said generalised non-linear system in order to give effect to the energy transfer, and

(b) materially producing the non-linear system so designed.

A third aspect of the present invention provides a data processing system which can transfer energy from an input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to an output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said system comprising

means for identifying the first spectrum of the input signal from which energy is to be transferred,

means for specifying the second spectrum of the output signal to which said energy is to be transferred, and

means for calculating, using a frequency domain description of said output spectrum expressed in terms of a frequency domain description of said input signal and coefficients of a time domain description of a generalised non-linear system, the coefficients of a said time domain description of said generalised non-linear system in order to give effect to the energy transfer.

A fourth aspect of the present invention provides a computer program product for designing a non-linear system for transferring energy from an input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to an output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said computer program product comprising

computer program code means for identifying the first spectrum of the input signal from which energy is to be transferred,

computer program code means for specifying the second spectrum of the output signal to which said energy is to be transferred, and

computer program code means for calculating, using a frequency domain description of said output spectrum expressed in terms of a frequency domain description of said input signal and coefficients of a time domain description of a generalised non-linear system, the coefficients of a said time domain description of said generalised non-linear system in order to give effect to the energy transfer.

A fifth aspect of the present invention provides a non-linear system which can transfer energy from an input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to an output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said system comprising

means for identifying the first spectrum of the input signal from which energy is to be transferred,

means for specifying the second spectrum of the output signal to which said energy is to be transferred, and

means for giving effect to the energy transfer using coefficients of a time domain description of a generalised non-linear system, said coefficients having been calculated using a frequency domain description of said output spectrum expressed in terms of a frequency domain description of said input signal and coefficients of a time domain description of a generalised non-linear system.

Advantageously, the fifth embodiment allows to processing for the determination of the coefficients to be performed off-line and merely incorporated into a non-linear system which uses the coefficients.

Embodiments of the present invention will be described by way of examples only, with reference to the accompanying in which:

figure 1 shows the effect of traditional signal processing by, for example, a linear filter;

figure 2 illustrates signal processing according to one aspect of the present invention;

figure 3 depicts a further example of the signal processing according to the present invention;

figure 4 shows a non-linear system arranged to give effect to the energy transformation shown in figure 3;

figure 5 illustrates a further energy transformation in which energy is distributed over a wider frequency band;

figure 6 illustrates the power spectral densities for the input and output signals of a designed nonlinear system;

figure 7 illustrates the power spectral densities for the input and output signals of another designed nonlinear system;

figure 8 depicts schematically a non-linear system;

figure 9 shows a digital implementation of the non-linear system shown in figure 8;

figure 10 illustrates the power spectral densities for the input and output signals of the nonlinear system which was obtained using a design which improves the filtering effect shown in figure 6;

figure 11 illustrates the power spectral densities for the input and output signals of the nonlinear system which was

obtained using a design which improves the filtering effect shown in figure 7;

figure 12 shows the time domain input and output of the nonlinear system with the frequency domain filtering effect shown in figure 10;

figure 13 shows the time domain input and output of the nonlinear system with the frequency domain filtering effect shown in figure 11;

figure 14 depicts the structure of a designed nonlinear system;

figure 15 illustrates the frequency spectrum of a signal to be processed using the present invention;

figure 16 illustrates the result of a Fast Fourier Transform of an input signal having the spectrum shown in figure 15;

figure 17 illustrates the results of the n-dimensional ($n=2$ and 3) convolution integration for the spectrum shown in figure 16;

figure 18 illustrates the output magnitude frequency response of a designed nonlinear system to an input signal having the frequency spectrum shown in figure 15;

figure 19 shows the frequency spectrum of a further signal to be processed using the present invention;

figure 20 illustrates the output magnitude frequency response of the same nonlinear system as shown in figure 18 to the further signal to be processed having the frequency spectrum shown in figure 19;

figure 21 illustrates the frequency spectrum of a still further signal to be processed using the present invention;

figure 22 illustrates the output magnitude frequency response of the same nonlinear system as in figure 18 to the still further signal to be processed having the frequency spectrum shown in figure 21;

figure 23 illustrates the structure of another designed nonlinear system;

figure 24 shows the continuous time realisation of the discrete time system in figure 23;

figure 25 shows a mechanical implementation of the continuous time system in figure 24;

figure 26 illustrates the result of a Fast Fourier Transform of the further signal shown in figure 19;

figure 27 illustrates the output magnitude frequency response of a further designed nonlinear system to the further signal shown in figure 19;

figure 28 illustrates the output magnitude frequency response of a still further designed nonlinear system to the signal shown in figure 15;

figure 29 illustrates the output magnitude frequency response of the nonlinear system shown in figure 28 to the further signal shown in figure 19;

figure 30 illustrates a flow chart for designing a nonlinear system according to an embodiment;

figure 31 illustrates a flow chart for designing a nonlinear system according to a further embodiment;

figure 32 illustrates a data processing system upon which embodiments of the present invention can be implemented.

Referring to figure 1, there is shown the principle of, for example, traditional low pass, high pass, and band pass filtering. Figure 1 shows the power spectrum of a signal 100 both before and after processing. The energy of a signal 100 to be filtered comprises two parts, namely, a first part 102 for further processing or of interest and a second part 104 which is of no interest. Typically, the second part 104 of the signal is attenuated which results in a second signal 106. The second signal 106 comprises the original or a copy of the first part 102 and an attenuated portion or an attenuated version of the second part 108.

Figure 2 illustrates the principle of signal processing according to one aspect of the present invention. Figure 2 shows the power spectrum of a signal 200 both before and after processing. The signal comprises a first portion 202 and a second portion 204. The first portion 202 of the signal 200 is of interest for further processing or output. Accordingly, as a result of the signal processing using the present invention, the first portion 202 is retained and the energy in the second portion 204 is translated to another frequency band 206.

I. DETAILED DESCRIPTION

The theory and method underlying the present invention will now be described in general terms in steps (i) to (vi).

(i) Determine the frequency spectrum of a signal to be processed, including the range of frequencies of the signal.

(ii) Specify the frequency spectrum of the output signal.

(iii) Determine the structure of a Nonlinear Auto-Regressive model with exogenous inputs (NARX model) to ensure that the energy transformation between different frequency bands and other design requirements, for example, specifications for magnitude and/or phase of the output spectrum over the required output frequency band can be met or realised.

The general expression for a NARX model is given by

$$y(k) = \sum_{n=1}^N y_n(k) \quad (1)$$

where $y_n(k)$ is a 'NARX nth-order output' given by

$$y_n(k) = \sum_{p=0}^n \sum_{l_1, l_{p+q}=1}^{K_n} c_{pq}(l_1, \dots, l_{n+q}) \prod_{i=1}^p y(k-l_i) \prod_{i=p+1}^{p+q} u(k-l_i) \quad (2)$$

with

$$p+q=n, \quad l_i=1, \dots, K_n, \quad i=1, \dots, p+q, \quad \text{and} \quad \sum_{l_1, l_{p+q}=1}^{K_n} \equiv \sum_{l_1=1}^{K_n} \dots \sum_{l_{p+q}=1}^{K_n}$$

K_n is the maximum lag and $y(\cdot)$, $u(\cdot)$, and $c_{pq}(\cdot)$ are the output, input, and model coefficients respectively. A specific instance of the NARX model such as

$$y(k) = 0.3u(k-1) + 0.7y(k-1) - 0.02u(k-1)u(k-1) - 0.04u(k-2)u(k-1) - 0.06y(k-1)u(k-3) - 0.08y(k-2)y(k-3)$$

may be obtained from the general form (1) and (2) with

$$c_{01}(1)=0.3, \quad c_{10}(1)=0.7, \quad c_{02}(1,1)=-0.02, \quad c_{02}(2,1)=-0.04, \\ c_{11}(1,3)=-0.06, \quad c_{20}(2,3)=-0.08, \quad \text{else } c_{pq}(\cdot)=0$$

Simplified designs will be considered below where the NARX model with only input nonlinearities is employed. However, it will be appreciated by one skilled in the art that the present invention is not limited to use in relation to only input nonlinearities. The present invention can equally well be used in circumstances of both non-linear outputs and non-linear inputs and outputs. Equally, the invention is not restricted to realisation as a NARX model. The invention may be realised using many alternative model forms either in discrete time or continuous time. Models such as the Hammerstein and Wiener model, or continuous time models, for example, a nonlinear differential equation model could be used or any other model which can be mapped into the frequency domain. However, for each of the models the main design principle is the same.

The NARX model with only input nonlinearities is given by equation (1) where

$$y_n(k) = \begin{cases} \sum_{l_1, l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i) & \text{for } n \geq 2 \\ \sum_{l_1=1}^{K_1} c_{10}(l_1) y(k-l_1) + \sum_{l_1=1}^{K_1} c_{01}(l_1) u(k-l_1) & \text{for } n=1 \end{cases} \quad (3)$$

The structure of the NARX model (1) and (3) is defined by the values of N , $K_n, n=1, \dots, N$, and, for each n (an integer between 1 and N inclusive), involves terms of the form

$$c_{0n}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i) \quad l_i = 1, \dots, K_n, \quad i=1, \dots, n,$$

when $n \geq 2$ and

$$c_{10}(l_1) y(k-l_1), \quad c_{01}(l_1) u(k-l_1), \quad l_1 = 1, \dots, K_1$$

when $n=1$ in the model.

The parameter N in the non-linear model (1) and (3) is associated with the realisability of the model required to give effect to the energy transformation. The ability to be able to realise the energy transformation is determined from the relationship between the input and output frequencies or frequency ranges of non-linear systems.

The structure parameters $K_n, n=1, \dots, N$, are associated with the extent to which specific design requirements such as the magnitude and/or phase of the output spectrum over the required output frequency band can be satisfied. These parameters are iteratively determined as part of the design. The model could initially be assumed to be of a simple form in terms of these parameters. However, if the initial choice of parameters does not produce a satisfactory design the parameters are progressively or gradually revised according to the energy transfer effect of the resulting non-linear system.

For systems described by the NARX model (1) and (3), the relationship between the input and output frequencies or frequency ranges is given by

$$f_Y = f_{Y_N} \cup f_{Y_{N-1}} \quad (4)$$

where f_Y denotes the range of frequencies of the output, and f_{Y_N} and $f_{Y_{N-1}}$ denote the ranges of frequencies produced by the N th-order and $(N-1)$ th-order nonlinearities, and

$$f_{Y_N} = \begin{cases} \bigcup_{k=0}^{i-1} I_k & \text{when } \frac{nb}{(a+b)} - \left\lceil \frac{na}{(a+b)} \right\rceil < 1 \\ \bigcup_{k=0}^{i-1} I_k & \text{when } \frac{nb}{(a+b)} - \left\lceil \frac{na}{(a+b)} \right\rceil \geq 1 \end{cases}$$

$$n = N \quad \text{and} \quad N-1$$

where $[.]$ relates to or means take the integer part,

$$i' = \left[\frac{na}{(a+b)} \right] + 1$$

$$I_k = [na - k(a+b), nb - k(a+b)] \quad \text{for } k=0, \dots, i'-1,$$

$$I_{i'} = [0, nb - i'(a+b)],$$

and the frequencies of the signal to be processed are in the range defined by the interval $[a, b]$.

Given $[a, b]$ and the required output frequency range f_y , the smallest N for the NARX model (1) and (3) which can bring about the specified frequency domain energy transformation can be determined from equation 4.

(iv) Map the NARX model with the structure given in (iii) into the frequency domain to yield the frequency domain description. The frequency domain description is given in terms of the Generalised Frequency Response Functions (GFRFs), $H_n(jw_1, \dots, jw_n)$, $n=1, \dots, N$, which, after this mapping, are specified in terms of time domain model parameters.

The mapping of the NARX model (1) and (3) between the time domain and the frequency domain is given by

$$H_n(jw_1, \dots, jw_n) = \frac{1}{\left\{ 1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp[-j(w_1 l_1 + \dots + w_n l_n)] \right\} \sum_{l_1, l_n=1}^{K_n} c_{n0}(l_1, \dots, l_n) \exp[-j(w_1 l_1 + \dots + w_n l_n)]}$$

$$n = 1, \dots, N \quad (5)$$

Therefore the frequency domain properties of the system can be completely defined in terms of the parameters $c_{pq}(\cdot)$ of the time domain description of the system.

(v) The output frequency response of the non-linear system (1) and (3) is given by

$$Y(jw) = \sum_{n=1}^N Y_n(jw) \quad (6)$$

where

$$Y_n(jw) = \frac{1/\sqrt{n}}{(2\pi)^{n-1}} \int_{w_1 + \dots + w_n = w} H_n(jw_1, \dots, jw_n) \prod_{i=1}^n U(jw_i) d\sigma_w \quad (7)$$

with

$$\int_{w_1 + \dots + w_n = w} (\cdot) d\sigma_w$$

denoting an integration over the n th-dimensional hyper-plane $w_1 + \dots + w_n = w$

Based on this relationship, the parameters in $H_n(jw_1, \dots, jw_n)$, $n=1, \dots, N$, which, due to the mapping performed in (iv), are the same parameters as those in the time domain model are determined. This step enables the shape of the

output frequency spectrum $Y(j\omega)$ to be defined which in turn ensures that the spectrum approaches the specified output frequency spectrum as closely as possible.

Different design specifications can lead to different implementations of corresponding designs.

(v.1) Firstly, given knowledge of the input spectrum $U(j\omega)$ and the required output spectrum $Y^*(j\omega)$. Substituting (5) and (7) into (6) yields

$$Y(j\omega) = \frac{1}{\left\{1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp(-j\omega l_1)\right\}} \sum_{n=1}^N \frac{1/\sqrt{n}}{(2\pi)^{(n-1)}} \sum_{l_1, l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \times \int_{\omega_1 + \dots + \omega_n = \omega} \exp[-j(\omega_1 l_1 + \dots + \omega_n l_n)] \prod_{i=1}^n U(j\omega_i) d\omega_i \quad (8)$$

Equation (8) enables the parameters associated with the time domain NARX model,

$c_{0n}(l_1, \dots, l_n), l_1=1, \dots, K_n, \dots, l_n=1, \dots, K_n, n=1, \dots, N,$

and

$c_{10}(l_1), l_1=1, \dots, K_1,$

to be determined as follows to implement the required design:

1) Based upon the equation

$$Y^*(j\omega) = \sum_{n=1}^N \frac{1/\sqrt{n}}{(2\pi)^{(n-1)}} \sum_{l_1, l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \times \int_{\omega_1 + \dots + \omega_n = \omega} \exp[-j(\omega_1 l_1 + \dots + \omega_n l_n)] \prod_{i=1}^n U(j\omega_i) d\omega_i \quad (9)$$

determine parameters

$c_{0n}(l_1, \dots, l_n), l_1=1, \dots, K_n, \dots, l_n=1, \dots, K_n, n=1, \dots, N,$

using a least squares routine to make the right hand side of equation (9) approach the specified output spectrum as closely as possible.

The first term on the right hand side of equation (8)

$$\frac{1}{\left\{1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp(-j\omega l_1)\right\}}$$

is omitted from (9). The omitted term represents linear output terms in the time domain realisation of the nonlinear system and these may not be needed to achieve the design at this step, hence they are omitted from (9).

2) In order to augment the performance of a filter designed as above, it may be desirable to also design a suitable linear filter $H(jw)$ to improve the approximation to $Y^*(jw)$ obtained in 1) above such that

$$H(jw) = \sum_{n=1}^N \frac{1/\sqrt{n}}{(2\pi)^{(n-1)}} \sum_{l_1, l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \times \int_{w_1 + \dots + w_n = w} \exp[-j(w_1 l_1 + \dots + w_n l_n)] \prod_{i=1}^n U(jw_i) d\sigma_w$$

can achieve a better approximation to $Y^*(jw)$. As part of this linear design the parameters $c_{10}(l_1)$, $l_1 = 1, \dots, K_1$ which were omitted from (8) to get (9), can be obtained from the parameters of the linear filter.

Design 1 hereafter illustrates the design of a non-linear system using this first case.

(V.2) Secondly, given the input spectrum $U(jw)$, and a specified bound for the magnitude of the required output spectrum, $Y^B(w)$.

A bound $Y^B(w)$ for the magnitude of the output spectrum $Y(jw)$ of the NARX model (1) and (3) can be expressed as

$$Y^B(w) = \sum_{n=1}^N \frac{1}{(2\pi)^{(n-1)}} |H_n(jw_1, \dots, jw_n)|_w^B \underbrace{|U| * \dots * |U(jw)|}_n \quad (10)$$

according to the result in Billings, S.A. and Lang, Zi-Qiang, 1996, A bound for the magnitude characteristics of nonlinear output frequency response functions, Part 1: Analysis and computation. Int. J. Control, Vol.65, pp309-328, where

$$\underbrace{|U| * \dots * |U(jw)|}_n$$

denotes the n-dimensional convolution integration for the magnitude characteristic of the input spectrum and

$$|H_n(jw_1, \dots, jw_n)|_w^B$$

represents a bound for the GFRFs magnitude

$$|H_n(jw_1, \dots, jw_n)|$$

with w_1, \dots, w_n satisfying the constraint $w_1 + \dots + w_n = w$. For the NARX model (1) and (3),

$$|H_n(jw_1, \dots, jw_n)|_w^B$$

can be evaluated as follows

$$|H_n(jw_1, \dots, jw_n)|_w^B = \frac{1}{\left| 1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp(-jw_1 l_1) \right|} \sum_{l_1, l_n=1}^{K_n} |c_{0n}(l_1, \dots, l_n)| \quad (11)$$

Combining (10) and (11) yields

$$Y^B(w) = \frac{1}{\left| 1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp(-jw_1 l_1) \right|} \sum_{n=1}^N \frac{1}{(2\pi)^{(n-1)}} C_n \underbrace{|U| \dots |U(jw)|}_n \quad (12)$$

where

$$C_n = \sum_{l_1, l_n=1}^{K_n} |c_{0n}(l_1, \dots, l_n)|$$

Equation (11) enables

$$C_n = \sum_{l_1, l_n=1}^{K_n} |c_{0n}(l_1, \dots, l_n)|$$

and $c_{10}(l_1)$, $l_1=1, \dots, K_1$ to be determined for shaping the bound $Y^B(w)$ for $Y(jw)$ in order to make this bound approach $Y^{B*}(w)$. The procedure which can be used to achieve this is as below.

1) Based upon the equation

$$Y^{B*}(w) = \sum_{n=1}^N \frac{1}{(2\pi)^{(n-1)}} C_n \underbrace{|U| \dots |U(jw)|}_n \quad (13)$$

use a least squares routine to make the right hand side of the above equation approach $Y^{B*}(w)$ especially over the frequencies or frequency range to which the required energy transformation needs to be implemented. The coefficients C_n , $n=1, \dots, N$, in equation (13) must be constrained to be positive since C_n is the result of the summation of the modulus of the coefficients $c_{0n}(l_1, \dots, l_n)$, $l_1=1, \dots, K_1, \dots, l_n=1, \dots, K_n$.

The first term on the right hand side of equation (12)

$$\frac{1}{\left| 1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp(-jw_1 l_1) \right|}$$

is omitted from (13). The omitted term represents linear output terms in the time domain realisation. These omitted terms may not be needed to achieve the design at this step, hence they are omitted from (13).

2) If necessary, the approximation to $y^{B*}(w)$ in 1) above can be supplemented using a linear filter with a magnitude characteristic $|H(jw)|$ such that

$$|H(jw)| \sum_{n=1}^N \frac{1}{(2\pi)^{(n-1)}} C_n \underbrace{|U| * \dots * |U(jw)|}_n$$

provides a better approximation to the specified bound and as a result $c_{10}(l_1)$, $l_1=1, \dots, K_1$, which were omitted from (12) to get (13), can be obtained from the linear filter parameters.

Design 2 hereafter illustrates the detailed procedure of the above and several examples of the design.

(V.3) Thirdly, there are many practical situations which should be dealt with on an individual basis. There follows examples of two such situations.

(a) Referring to figure 3 there is shown an input signal having a spectrum $U(jw)$ 300 which comprises a portion 302 of interest, between frequencies a and e, and an portion 304, between frequencies e and b, to be translated to another frequency range 306 defined by frequencies f and 2b while retaining the portion of interest 302 within the output signal 308.

In order to realise the energy transformation shown in figure 3, a non-linear system 400 can be constructed as illustrated in figure 4 which comprises means 402, 404 and 406 for implementing the following components

$H_1(jw)$, $H_2(jw_1, jw_2)$, and $H(jw)$.

$H_1(jw)$ 402 and $H(jw)$ 406 can be implemented readily using classical linear band pass filters, while $H_2(jw_1, jw_2)$ 404 can be constructed in the time domain as shown in the equation below

$$y_2(k) = \sum_{l_1, l_2=1}^{K_2} c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i)$$

with the parameters, $c_{02}(l_1, l_2)$, $l_1=1, \dots, K_2$, $l_2=1, \dots, K_2$ being determined to produce the signal $y_2(k)$ with a required frequency characteristic. Each of the components 402, 404 and 406 have corresponding frequency responses 408, 410 and 412. Consequently, the whole non-linear system can be realised as a non-linear time domain filter as

$$y(k) = H_1(q^{-1}) u(k) + H(q^{-1}) \sum_{l_1, l_2=1}^{K_2} c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i)$$

THIS PAGE BLANK (USPTO)

$$= \frac{H_{1N}(q^{-1})}{H_{1D}(q^{-1})} u(k) + \frac{H_N(q^{-1})}{H_D(q^{-1})} \sum_{l_1, l_2=1}^{K_2} c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i)$$

where

$$H_1(q^{-1}) = \frac{H_{1N}(q^{-1})}{H_{1D}(q^{-1})}, \quad H(q^{-1}) = \frac{H_N(q^{-1})}{H_D(q^{-1})}$$

are the backward shift operator descriptions of the linear filters which have the frequency response functions $H_1(j\omega)$ and $H(j\omega)$, respectively.

The equation for $y(k)$ can be further written as

$$H_{1D}(q^{-1}) H_D(q^{-1}) y(k) = H_{1N}(q^{-1}) H_D(q^{-1}) u(k) + H_N(q^{-1}) H_{1D}(q^{-1}) \sum_{l_1, l_2=1}^{K_2} c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i)$$

which is clearly a NARX model that can be described by equations (1) and (3).

Although the above shows energy transformation from a frequency band to a higher frequency band, energy can equally well be transferred from one frequency band to a lower frequency band.

(b) If the objective of the energy transformation and hence the desired non-linear system is only to distribute energy of the signal to be processed over a wider frequency band without energy amplification then a simpler model may be sufficient. Referring to figure 5, there is shown schematically an input signal 500 in the frequency domain comprising energy between frequencies a and b. The desired output frequency spectrum 502 comprises two portions, a lower frequency portion 504 and a higher frequency portion 506. It will be appreciated that the energy of the input signal 500 is to be spread over the two frequency ranges 504 and 506.

A quadratic filter, for example,

$$y(k) = \alpha u^2(k)$$

can be designed to redistribute energy of the original signal $u(k)$, with frequency components over the frequency band $[a, b]$, to the new ranges $[0, b-a]$ and $[2a, 2b]$ without energy amplification provided an appropriate α is selected in the design process described above.

(vi) The final step in the design process is to materially realise, that is, to physically realise the designed filter using appropriate software or hardware or combination of software and hardware.

Although the present invention has been described above with reference to a NARX model, it will be appreciated that the present invention is not limited thereto. The method and realisation of non-linear systems having pre-determinable frequency or energy transfer characteristics can equally well be utilised using other forms of descriptions of non-linear systems or models where there exists a requirement to transform or transfer energy at one frequency or band of frequencies to energy at another frequency or band of frequencies.

The present invention can be used to realise energy transformations over frequencies using a nonlinear system or to modify energy transformation of an existing linear or non-linear system.

Furthermore, the present invention can be applied or utilised in the field of design and realisation of electronic circuits or filters. The energy in the input signal at a particular frequency or band of frequencies is transferred to desired frequency bands. Similarly, in mechanical systems, the addition of non-linear mechanisms could transfer the energy of a vibration at an undesirable frequency to some other frequency. The present invention may also find application in the field of fluid mechanics, for example, in the effects of flow around objects (e.g. oil platform legs), noise in ducting and pipe flow systems.

Alternatively, the modifications which are required to be effected to a known linear or non-linear system, for example, a mechanical system, in order to bring about a particular frequency distribution of energy can be determined using the present invention and then the linear or non-linear system can be so modified.

II. EXAMPLES

II.1 DESIGN 1

Design No.1 shows an example of how the energy of an input signal having predetermined frequency components can be transferred to other frequencies.

Consider digitally filtering an input signal
 $u(t) = \cos t + \cos 2t,$ (14)
wherein the sampling period is $T = 1/100$ s.

The first step is to determine the frequency spectrum of the signal to be processed. The frequency spectrum of the

signal to be processed comprises input frequencies
 $w_{a1}=1$ and $w_{a2}=2$.

The second step is to specify the output frequency characteristics of the filter. Two different filtering problems will be considered for this example.

The specification for the first problem is to transfer the energy in $u(t)$ to the output frequency $w_{ao}=0$ and the specification for the second problem is to transfer the energy in $u(t)$ to the output frequency $w_{ao}=4$.

Since the sampling period is $T=1/100$ s, the digital input to the filter is

$$u(k) = \cos \frac{1}{100}k + \cos \frac{2}{100}k \quad \text{for } k=0,1,\dots, \quad (15)$$

the normalised input frequencies are therefore

$$w_{d1}=1/100 \quad \text{and} \quad w_{d2}=2/100,$$

and the required normalised output frequencies are

$w_{do}=0$ for the first filtering problem and $w_{do}=4/100$ for the second filtering problem.

For this example, the output frequencies produced by the n th-order nonlinearity of a non-linear filter are distributed uniformly in

$$f_r = \begin{cases} \bigcup_{j=0}^{i^*-1} I_j & \text{when } \frac{nb}{(a+b)} - \left[\frac{na}{(a+b)} \right] < 1 \\ \bigcup_{j=0}^{i^*} I_j & \text{when } \frac{nb}{(a+b)} - \left[\frac{na}{(a+b)} \right] \geq 1 \end{cases} \quad (16)$$

where $a=\frac{1}{100}$, $b=\frac{2}{100}$, $[x]$ means to take the integer part of x , and

$$i^* = \left[\frac{na}{(a+b)} \right] + 1,$$

$$I_j = [na - j(a+b), nb - j(a+b)] \quad \text{for } j=0, \dots, i^*-1,$$

$$I_{i^*} = [0, nb - i^*(a+b)],$$

with the difference between any two neighbouring frequencies

$$\text{being } \Delta = \frac{2}{100} - \frac{1}{100} = \frac{1}{100}.$$

For $n=1$, it can be evaluated from the above equations that

$$f_{x_1} = \left[\frac{1}{100}, \frac{2}{100} \right]$$

(17)

and the corresponding output frequencies are

$$\left\{ \frac{1}{100}, \frac{2}{100} \right\}$$

For $n=2$, it can be similarly obtained that

$$f_{x_2} = I_0 \cup I_1 = \left[\frac{2}{100}, \frac{4}{100} \right] \cup \left[0, \frac{4}{100} - \frac{3}{100} \right] = \left[\frac{2}{100}, \frac{4}{100} \right] \cup \left[0, \frac{1}{100} \right]$$

and the corresponding output frequencies are

$$\left\{ 0, \frac{1}{100}, \frac{2}{100}, \frac{3}{100}, \frac{4}{100} \right\}$$

Therefore, a NARX model of up to second order nonlinearity will be sufficient to realise the energy transformations required by the filtering example thereby addressing the third step in the design process.

According to the above analysis, select a NARX model of the form

$$y(k) = \sum_{k_1=1}^{K_1} c_{10}(k_1) y(k-k_1) + \sum_{k_1=0}^{K_2} \sum_{k_2=0}^{K_2} c_{02}(k_1, k_2) u(k-k_1) u(k-k_2) \quad (18)$$

as the basic structure for the non-linear filter and take $K_2=1$ for simplicity. The parameters K_1 , $c_{10}(1), \dots, c_{10}(K_1)$ and $c_{02}(k_1, k_2)$, $k_1=0,1$ and $k_2=0,1$, then need to be determined to completely specify the design.

In order to derive the procedures for determining these parameters, consider the frequency domain characteristics of the filter model (18). According to J.C.Peyton Jones and S.A.Billings, Recursive Algorithm for Computing the Frequency Response of a Class of Non-linear Difference Equation Models, Int. J. Control, 1989, Vol.50, No.5, 1925-1940, the generalised frequency response functions of this filter model are

$$\begin{cases} H_1(j\omega) = 0 \\ H_2(j\omega_1, j\omega_2) = \frac{\sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) \exp[-j(\omega_1 k_1 + \omega_2 k_2)]}{\left[1 - \sum_{k_1=1}^{K_1} c_{10}(k_1) \exp[-j(\omega_1 + \omega_2) k_1] \right]} \\ H_n(j\omega_1, \dots, j\omega_n) = 0 \quad \text{for } n \geq 3 \end{cases} \quad (19)$$

The output frequency response of the filter (18) under the input

$$u(k) = \cos \frac{1}{100} k + \cos \frac{2}{100} k = \sum_{l=-K, l \neq 0}^K \frac{A(\omega_l)}{2} e^{j\omega_l t} \quad (20)$$

with $K=2$, $A(w_i)=1$, $w_i = i/100$, $w_{-i} = -w_i$, $i = \pm 1, \pm 2$, can be written as

$$\tilde{Y}(jw) = \sum_{n=1}^N \tilde{Y}_n(jw) = \tilde{Y}_2(jw) = \begin{cases} \frac{1}{2} \sum_{w_{i_1} + w_{i_2} = w} A(w_{i_1}) A(w_{i_2}) H_2(jw_{i_1}, jw_{i_2}) & \text{for } w > 0 \\ \frac{1}{4} \sum_{w_{i_1} + w_{i_2} = w} A(w_{i_1}) A(w_{i_2}) H_2(jw_{i_1}, jw_{i_2}) & \text{for } w = 0 \end{cases} \quad (21)$$

where $i_1, i_2 \in \{-2, -1, +1, +2\}$, $\tilde{Y}(jw)$ is related to the output spectrum $Y(jw)$ by

$$\tilde{Y}(jw) = \begin{cases} 2Y(jw) & \text{for } w > 0 \\ Y(jw) & \text{for } w = 0 \end{cases}$$

and, similarly, $\tilde{Y}_n(jw)$ is related to the n th-order output spectrum $Y_n(jw)$ by

$$\tilde{Y}_n(jw) = \begin{cases} 2Y_n(jw) & \text{for } w > 0 \\ Y_n(jw) & \text{for } w = 0 \end{cases}$$

This is a specific form of the general expression for output frequency responses of non-linear systems which are given by

$$Y(jw) = \sum_{n=1}^N Y_n(jw) \quad (22)$$

where

$$Y_n(jw) = \frac{1/\sqrt{n}}{(2\pi)^{n-1}} \int_{w_1 + \dots + w_n = w} H_n(jw_1, \dots, jw_n) \prod_{i=1}^n U(jw_i) d\sigma_w \quad (23)$$

with

$$\int_{w_1 + \dots + w_n = w} (.) d\sigma_w$$

denoting an integration over the n th-dimensional hyper-plane $w_1 + \dots + w_n = w$ and N being the maximum order of the dominant system nonlinearities.

Substituting (19) into (21) yields

$$\begin{aligned} \tilde{Y}(jw) &= \frac{1}{2} \sum_{w_{i_1} + w_{i_2} = w} A(w_{i_1}) A(w_{i_2}) \frac{\sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) \exp[-j(w_{i_1} k_1 + w_{i_2} k_2)]}{\left[1 - \sum_{k_1=1}^{K_1} c_{10}(k_1) \exp[-j(w_{i_1} + w_{i_2}) k_1]\right]} \\ &= \frac{1}{1 - \sum_{k_1=1}^{K_1} c_{10}(k_1) \exp[-jw k_1]} \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) \frac{1}{2} \sum_{w_{i_1} + w_{i_2} = w} A(w_{i_1}) A(w_{i_2}) \exp[-j(w_{i_1} k_1 + w_{i_2} k_2)] \\ &= H(jw) \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) f(w, k_1, k_2) \quad \text{for } w > 0 \end{aligned} \quad (24)$$

and

$$\tilde{Y}(jw) = H(jw) \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) \frac{f(w, k_1, k_2)}{2} \quad \text{for } w = 0 \quad (25)$$

where

$$H(jw) = \frac{1}{1 - \sum_{k_1=1}^{K_1} c_{10}(k_1) \exp[-jw k_1]} \quad (26)$$

$$f(w, k_1, k_2) = \frac{1}{2} \sum_{w_{i_1} + w_{i_2} = w} A(w_{i_1}) A(w_{i_2}) \exp[-j(w_{i_1} k_1 + w_{i_2} k_2)] \quad (27)$$

Moreover denoting

$$\bar{Y}(jw) = \begin{cases} \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) f(w, k_1, k_2) & \text{for } w > 0 \\ \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) \frac{f(w, k_1, k_2)}{2} & \text{for } w = 0 \end{cases} \quad (28)$$

gives

$$\tilde{Y}(jw) = H(jw) \bar{Y}(jw), \quad w \geq 0 \quad (29)$$

In view of the fact that $H(jw)$ is the frequency response function of a classical linear filter and $\bar{Y}(jw)$ is a linear function of the filter parameters $c_{02}(k_1, k_2)$, $k_1 = 0, 1$ and $k_2 = 0, 1$, the procedures for determining the parameters of the non-linear filter with the given design requirements and the structure (18) are given as :

(a) From the design requirements, determine the desired output frequency characteristic $\tilde{Y}^*(jw)$ and choose the parameters $c_{02}(k_1, k_2)$, $k_1 = 0, 1$ and $k_2 = 0, 1$, appropriately to make $\bar{Y}(jw)$ approximate $\tilde{Y}^*(jw)$ as well as possible.

(b) Examine the filtering effect of

$$\bar{Y}(k) = \sum_{k_1=0}^1 \sum_{k_2=0}^1 \hat{c}_{02}(k_1, k_2) u(k - k_2) u(k - k_1), \quad (30)$$

where $\hat{c}_{02}(k_1, k_2)$, $k_1 = 0, 1$, $k_2 = 0, 1$, are the results obtained in the procedure (a). If the effect is acceptable, then choose $H(jw) = 1$ so that the filter parameters

$$c_{10}(1) = c_{10}(2) = \dots = c_{10}(K_1) = 0;$$

otherwise design the classical linear filter $H(jw)$ to make $H(jw) \bar{Y}(jw)$ satisfy the requirements for the output frequency characteristics and obtain the filter parameters K_1 , $c_{10}(1)$, $c_{10}(2)$, ..., $c_{10}(K_1)$ at the same time.

Therefore, in order to address the first problem to transfer energy from $u(t)$, $w_{a1} = 1$ and $w_{a2} = 2$, to the output frequency $w_{a0} = 0$, take

$$\tilde{Y}^*(j0) = 1, \quad \tilde{Y}^*(jw_i) = 0, \quad w_i = \frac{i}{100}, \quad i = 1, 2, 3, 4.$$

and for the second problem to transfer energy from $u(t)$, $w_{a1}=1$ and $w_{a2}=2$, to the output frequency $w_{s0}=4$, take

$$\tilde{Y}^*(j\frac{4}{100})=1, \quad \tilde{Y}^*(jw_1)=0, \quad w_1=\frac{1}{100}, \quad i=1,2,3,0.$$

The filter parameters $\hat{c}_{02}(k_1, k_2)$, $k_1=0,1$, $k_2=0,1$, can then be determined through the group equations

$$\left\{ \begin{aligned} \operatorname{Re}[\tilde{Y}^*(j0)] &= \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) \frac{f^R(0, k_1, k_2)}{2} \\ &\vdots \\ \operatorname{Re}[\tilde{Y}^*(j\frac{4}{100})] &= \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) f^R(\frac{4}{100}, k_1, k_2) \\ \operatorname{Im}[\tilde{Y}^*(j0)] &= \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) \frac{f^I(0, k_1, k_2)}{2} \\ &\vdots \\ \operatorname{Im}[\tilde{Y}^*(j\frac{4}{100})] &= \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) f^I(\frac{4}{100}, k_1, k_2) \end{aligned} \right. \quad (31)$$

by the least squares method. In (31) $f^R(\cdot)$ and $f^I(\cdot)$ represent the real and imaginary parts of $f(\cdot)$.

Rewrite (31) as

$$\tilde{Y} = \bar{X} \theta \quad (32)$$

where

$$\tilde{Y} = \left[\operatorname{Re}[\tilde{Y}^*(j0)], \dots, \operatorname{Re}[\tilde{Y}^*(j\frac{4}{100})], \operatorname{Im}[\tilde{Y}^*(j0)], \dots, \operatorname{Im}[\tilde{Y}^*(j\frac{4}{100})] \right]^T \quad (33)$$

$$\theta = [c_{02}(0,0), c_{02}(1,1), c_{02}(0,1) + c_{02}(1,0)]^T \quad (34)$$

$$\bar{X} = \begin{bmatrix} \frac{f^R(0,0,0)}{2}, & \frac{f^R(0,1,1)}{2}, & \frac{f^R(0,0,1)}{2} \\ \vdots & \vdots & \vdots \\ f^R(\frac{4}{100}, 0, 0), & f^R(\frac{4}{100}, 1, 1), & f^R(\frac{4}{100}, 0, 1) \\ \frac{f^I(0,0,0)}{2}, & \frac{f^I(0,1,1)}{2}, & \frac{f^I(0,0,1)}{2} \\ \vdots & \vdots & \vdots \\ f^I(\frac{4}{100}, 0, 0), & f^I(\frac{4}{100}, 1, 1), & f^I(\frac{4}{100}, 0, 1) \end{bmatrix}$$

$$= \begin{bmatrix} \frac{4}{2} & \frac{4}{2} & \sum_{i=1}^2 \frac{\cos \frac{i}{100}}{2} \\ 2 & 2 \cos \frac{1}{100} & \cos \frac{1}{100} + \cos \frac{1}{100} \\ 1 & \cos \frac{2}{100} & \cos \frac{1}{100} \\ 2 & 2 \cos \frac{3}{100} & \cos \frac{1}{100} + \cos \frac{2}{100} \\ 1 & \cos \frac{4}{100} & \cos \frac{2}{100} \\ \frac{0}{2} & \frac{0}{2} & \sum_{i=1}^2 \frac{\sin \frac{i}{100}}{2} \\ 0 & -2 \sin \frac{1}{100} & \sin \frac{1}{100} - \sin \frac{2}{100} \\ 0 & -\sin \frac{2}{100} & -\sin \frac{1}{100} \\ 0 & -2 \sin \frac{3}{100} & -\sin \frac{1}{100} - \sin \frac{2}{100} \\ 0 & -\sin \frac{4}{100} & -\sin \frac{2}{100} \end{bmatrix} \quad (35)$$

Notice that θ can be written in the form of (34) due to the fact that

$$f(w, 0, 1) = f(w, 1, 0). \quad (36)$$

Therefore, the filter parameters θ for the first filtering problem to transfer energy from $u(t)$, $w_{a1}=1$ and $w_{a2}=2$, to the output frequency $w_{a0}=0$ can be obtained as

$$\hat{\theta}_1 = (\bar{X}^T \bar{X})^{-1} \bar{X}^T \bar{Y}_1 \quad (37)$$

where

$$\bar{Y}_1 = \begin{bmatrix} \overbrace{1, 0, \dots, 0}^1, \overbrace{0, 0, \dots, 0}^2 \end{bmatrix}^T. \quad (38)$$

and the parameters θ for the second filtering problem to transfer energy from $u(t)$, $w_{a1}=1$ and $w_{a2}=2$, to the output frequency $w_{a0}=4$ can be obtained as

$$\hat{\theta}_2 = (\bar{X}^T \bar{X})^{-1} \bar{X}^T \bar{Y}_2 \quad (39)$$

where

$$\bar{Y}_2 = \begin{bmatrix} \overbrace{0, \dots, 0}^1, 1, \overbrace{0, \dots, 0}^2 \end{bmatrix}^T. \quad (40)$$

The results of computing (37) and (39) are

$$\hat{\theta}_1 = \begin{bmatrix} \hat{C}_{02}^1(0, 0) \\ \hat{C}_{02}^1(1, 1) \\ \hat{C}_{02}^1(0, 1) + \hat{C}_{02}^1(1, 0) \end{bmatrix} = \begin{bmatrix} 1187 \\ 1187 \\ -2373.8 \end{bmatrix} \quad (41)$$

and

$$\hat{\theta}_2 = \begin{bmatrix} \hat{C}_{02}^2(0, 0) \\ \hat{C}_{02}^2(1, 1) \\ \hat{C}_{02}^2(0, 1) + \hat{C}_{02}^2(1, 0) \end{bmatrix} = \begin{bmatrix} -1206.2 \\ -1206.2 \\ 2413.2 \end{bmatrix} \quad (42)$$

respectively.

Under the input of (20), the power spectral densities of the input and output of the non-linear filter

$$\begin{aligned}\bar{Y}_1(k) &= \sum_{k_1=0}^1 \sum_{k_2=0}^1 \hat{c}_{02}^1(k_1, k_2) u(k-k_1) u(k-k_2) \\ &= \hat{c}_{02}^1(0,0)u^2(k) + \hat{c}_{02}^1(1,1)u^2(k-1) + [\hat{c}_{02}^1(1,0) + \hat{c}_{02}^1(0,1)]u(k-1)u(k)\end{aligned}\quad (43)$$

which is initially designed to address the first filtering problem above, are shown in figure 6, and the power spectral densities of the input and output of the non-linear filter

$$\begin{aligned}\bar{Y}_2(k) &= \sum_{k_1=0}^1 \sum_{k_2=0}^1 \hat{c}_{02}^2(k_1, k_2) u(k-k_1) u(k-k_2) \\ &= \hat{c}_{02}^2(0,0)u^2(k) + \hat{c}_{02}^2(1,1)u^2(k-1) + [\hat{c}_{02}^2(1,0) + \hat{c}_{02}^2(0,1)]u(k-1)u(k)\end{aligned}\quad (44)$$

which is initially designed to address the second filtering problem above, are shown in figure 7.

Further improvement to the performances of the filters (43) and (44) may be possible. Therefore, a linear filter, $H(j\omega)$, is designed in order to further improve the filter performances.

To improve the performance of the filter (43) for the first filtering problem, $H(j\omega)$ is designed to be a fifth order low-pass type 1 Chebyshev filter with cut off frequency 0.5 rad/sec and 0.5dB of ripple in the pass-band to ensure a satisfactory frequency response over the pass band. The result is

$$\begin{aligned}H_1(j\omega) &= \frac{b^1(1) + b^1(2)z^{-1} + \dots + b^1(6)z^{-5}}{1 - a^1(2)z^{-1} - \dots - a^1(6)z^{-5}} \Big|_{z=e^{j\omega}} \\ &= 10^{-12} \frac{0.0174 + 0.0853z^{-1} + 0.1812z^{-2} + 0.1652z^{-3} + 0.0933z^{-4} + 0.0159z^{-5}}{1 + 4.9941z^{-1} - 9.9765z^{-2} + 9.9648z^{-3} - 4.9766z^{-4} + 0.9942z^{-5}} \Big|_{z=e^{j\omega}}\end{aligned}\quad (45)$$

To improve the performance of the filter (44) for the second problem, $H(j\omega)$ is designed to be a fifth order high-pass type 1 Chebyshev filter with cut off frequency 3.9 rad/sec and 0.5dB of ripple in the pass band for the same purpose as in the first problem case. The result is

$$\begin{aligned}H_2(j\omega) &= \frac{b^2(1) + b^2(2)z^{-1} + \dots + b^2(6)z^{-5}}{1 - a^2(2)z^{-1} - \dots - a^2(6)z^{-5}} \Big|_{z=e^{j\omega}} \\ &= \frac{0.9218 - 4.6088z^{-1} + 9.2175z^{-2} - 9.2175z^{-3} + 4.6088z^{-4} - 0.9218z^{-5}}{1 + 4.8381z^{-1} - 9.3635z^{-2} + 9.0613z^{-3} - 4.3846z^{-4} + 0.8486z^{-5}} \Big|_{z=e^{j\omega}}\end{aligned}\quad (46)$$

The purpose of the additional linear filter is to attenuate unwanted frequency components in the outputs of the filters (43) and (44) for the above two filtering problems respectively to make the output of the additional filter satisfy the corresponding design requirement.

It will be appreciated that the filter parameters $K_1, c_{10}(1), \dots, c_{10}(K_1)$, associated with the expression $\left\{1 - \sum_{k_1=1}^{K_1} c_{10}(k_1) \exp[-j\omega k_1]\right\}$ in $H(j\omega)$ can be obtained as a result of dividing the denominator of $H(j\omega)$ by the numerator of $H(j\omega)$. The specific $H(j\omega)$ is given by $H_1(j\omega)$ and $H_2(j\omega)$ in equations (45) and (46) for the two filtering problems respectively.

The general description for the nonlinear filters designed as above is

$$y(k) - \sum_{k_1=1}^{K_1} c_{10}(k_1) y(k-k_1) = \left[1 - \sum_{k_1=1}^{K_1} c_{10}(k_1) q^{-k_1}\right] y(k) = \bar{H}(q^{-1}) y(k) \\ = \sum_{k_1=0}^{K_1} \sum_{k_2=0}^{K_2} c_{02}(k_1, k_2) u(k-k_1) u(k-k_2) = \sum_{k_1=0}^{K_1} \sum_{k_2=0}^{K_2} c_{02}(k_1, k_2) q_1^{-k_1} q_2^{-k_2} u(k) \quad (47)$$

where

$$\bar{H}(q^{-1}) = \left(1 - \sum_{k_1=1}^{K_1} c_{10}(k_1) q^{-k_1}\right), \quad (48)$$

and q^{-1} , q_1^{-1} and q_2^{-1} denote the backward shift operators. Another expression in the time domain for (47) is

$$y(k) = \bar{H}^{-1}(q^{-1}) \left[\sum_{k_1=0}^{K_1} \sum_{k_2=0}^{K_2} c_{02}(k_1, k_2) q_1^{-k_1} q_2^{-k_2} \right] u(k) \quad (49)$$

Therefore, embodiments of the non-linear filters which have been designed can be realised in a manner as shown in figure 8 or more specifically as shown figure 9.

It will be appreciated that in figure 8 the two components 800 and 802 are represented by

$$G_1(q_1^{-1}, q_2^{-1}) = \sum_{k_1=0}^1 \sum_{k_2=0}^1 c_{02}(k_1, k_2) q_1^{-k_1} q_2^{-k_2}$$

and

$$G_2(q^{-1}) = \bar{H}^{-1}(q^{-1}) = \frac{b(1) + b(2)q^{-1} + \dots + b(6)q^{-5}}{1 - a(2)q^{-1} - \dots - a(6)q^{-5}}$$

For the first filtering problem in this example

$$G_1(q_1^{-1}, q_2^{-1}) = \sum_{k_1=0}^1 \sum_{k_2=0}^1 \hat{c}_{02}^1(k_1, k_2) q_1^{-k_1} q_2^{-k_2}$$

with $\hat{c}_{02}^1(k_1, k_2)$'s given by (41) and

$$G_2(q^{-1}) = \frac{b^1(1) + b^1(2)q^{-1} + \dots + b^1(6)q^{-5}}{1 - a^1(2)q^{-1} - \dots - a^1(6)q^{-5}}$$

with $b^1(i)$'s and $a^1(i)$'s given by (45).

For the second filtering problem in this example

$$G_1(q_1^{-1}, q_2^{-1}) = \sum_{k_1=0}^1 \sum_{k_2=0}^1 \hat{c}_{\alpha}^2(k_1, k_2) q_1^{-k_1} q_2^{-k_2}$$

with $\hat{c}_{\alpha}^2(k_1, k_2)$'s given by (42) and

$$G_2(q^{-1}) = \frac{b^2(1) + b^2(2)q^{-1} + \dots + b^2(6)q^{-5}}{1 - a^2(2)q^{-1} - \dots - a^2(6)q^{-5}}$$

with $b^2(i)$'s and $a^2(i)$'s given by (46).

Referring to figures 10 and 11, there is shown the filtering effects of the filters designed to address the two filtering problems. Figure 10 shows the power spectrum densities of the output and input of the nonlinear filter which is finally obtained for the first filtering problem. Figure 11 shows the power spectrum densities of the output and input of the nonlinear filter which is finally obtained for the second filtering problem. The effects of the filtering in the time domain of the two filters are shown in figures 12 and 13. All the responses indicate that the filters substantially satisfy the design requirements.

II.2 DESIGN 2

Design No.2 illustrates the detailed procedure and several examples for designing a non-linear system for transferring the energy of a signal from a first predeterminable frequency or range of frequencies to a second predeterminable frequency or range of frequencies such that the output frequency response of the nonlinear system so designed is within specified bounds.

II.2.1 Detailed Procedure

- (1) Given $u(t)$, the signal to be processed in the time domain, the frequency band $[c,d]$ to which the energy of $u(t)$ is to be transferred, and the user specified bound $Y^B(w)$ for the output spectrum $Y(jw)$ over $[c,d]$ for the design.

- (2) Sample the time domain signal $u(t)$ with sampling interval T to yield a discrete time series $\{u(k)\}$ and perform a Fast Fourier Transform (FFT) on the series to compute the spectrum $U(jw)$ of $u(t)$ as

$$U\left(j\frac{2\pi}{MT}l\right) = TU_a\left(j\frac{2\pi}{M}l\right), \quad l = -\left(\frac{M}{2}-1\right), \dots, 0, \dots, \frac{M}{2}$$

where $U_a[j(\cdot)]$ is the result of the FFT operating on $\{u(k)\}$ and M is the length of the data used to perform the FFT. M is taken as an even number for convenience.

- (3) Evaluate the range $[a,b]$ of frequencies in $u(t)$ as

$$b = \frac{2\pi}{MT}l_b, \quad a = \frac{2\pi}{MT}l_a$$

where l_b is an integer such that

$$\left|U\left(j\frac{2\pi}{MT}l_b\right)\right| \geq 0.05, \quad \left|U\left(j\frac{2\pi}{MT}l\right)\right| < 0.05 \quad \text{for } l \in \{(l_b+1), \dots, \frac{M}{2}\}$$

and l_a is an integer such that

$$\left|U\left(j\frac{2\pi}{MT}l_a\right)\right| \geq 0.05, \quad \left|U\left(j\frac{2\pi}{MT}l\right)\right| < 0.05 \quad \text{for } l \in \{0, \dots, (l_a-1)\}$$

- (4) The relationship between the bound of the output spectrum $Y^B(w)$, the coefficients of the NARX model

$$y(k) = \sum_{n=1}^N y_n(k)$$

$$y_n(k) = \begin{cases} \sum_{l_1=1}^{K_n} \dots \sum_{l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i) & \text{for } n \geq 2 \\ \sum_{l_1=1}^{K_1} c_{10}(l_1) y(k-l_1) + \sum_{l_1=1}^{K_1} c_{01}(l_1) u(k-l_1) & \text{for } n=1 \end{cases}$$

and the spectrum $U(j\omega)$ is given by

$$Y^R(\omega) = \frac{1}{\left| 1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp(-j\omega l_1) \right|} \sum_{n=N_0}^N \frac{1}{(2\pi)^{(n-1)}} \left[\sum_{l_1=1}^{K_n} \dots \sum_{l_n=1}^{K_n} |c_{0n}(l_1, \dots, l_n)| \underbrace{|U|^* \dots |U(j\omega)|}_n \right]$$

$$= \frac{1}{\left| 1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp(-j\omega l_1) \right|} \sum_{n=N_0}^N \frac{1}{(2\pi)^{(n-1)}} C_n \underbrace{|U|^* \dots |U(j\omega)|}_n$$

where

$$C_n = \sum_{l_1=1}^{K_n} \dots \sum_{l_n=1}^{K_n} |c_{0n}(l_1, \dots, l_n)|, \quad n = N_0, \dots, N$$

are parameters associated with the NARX model parameters

$K_n, c_{0n}(l_1, \dots, l_n), l_1 = 1, \dots, K_n, \dots, l_n = 1, \dots, K_n, \text{ for } n = N_0, \dots, N,$

$\underbrace{|U|^* \dots |U(j\omega)|}_n$ denotes the n -dimensional convolution

integration for the magnitude $|U(j\omega)|$ of the spectrum $U(j\omega)$, which is defined by

$$\underbrace{|U|^* \dots |U(j\omega)|}_n = \int_{-\infty}^{\infty} \dots \int_{-\infty}^{\infty} |U(j\omega_1)| \dots |U(j(\omega - \omega_1 - \dots - \omega_{n-1}))| d\omega_1 \dots d\omega_{n-1}$$

and $N_0 = 1$ when the NARX model involves nonlinear terms from order 1 to N .

Based upon this expression, the structure parameters N and N_0 and the NARX model parameters are determined as below.

(1) Evaluate

$$f_{x_n} = \begin{cases} \bigcup_{i=1}^{i^*-1} I_i & \text{when } \frac{nb}{(a+b)} - \left\lceil \frac{na}{(a+b)} \right\rceil < 1 \\ \bigcup_{i=0}^{i^*} I_i & \text{when } \frac{nb}{(a+b)} - \left\lceil \frac{na}{(a+b)} \right\rceil \geq 1 \end{cases}$$

where $[x]$ denotes the integer part of x ,

$$i^* = \left\lceil \frac{na}{(a+b)} \right\rceil + 1$$

$$I_i = [na - i(a+b), nb - i(a+b)], \quad \text{for } i = 0, \dots, i^* - 1$$

$$I_i = [0, nb - i^*(a+b)]$$

for $n=1, 2, \dots$ until a value of n is reached such that part of the specified output frequency range $[c, d]$ falls into f_n . This value of n is used as the value of N_0 .

(ii) Evaluate

$$f_r = f_n \cup f_{n-1}$$

for $n=2, 3, \dots$ until a value of n is reached such that the frequency range $[c, d]$ falls completely within the corresponding f_r . This value of n is taken as the value of N .

(iii) Calculate

$$\underbrace{|U|^* \dots |U|}_{n} (j\omega)$$

to yield

$$\underbrace{|U|^* \dots |U|}_{n} (j2\pi i/MT), \quad \text{for } i = 0, \dots, M/2$$

using the algorithm

$$\left\{ \begin{array}{l} \underbrace{|U|^* \dots |U|}_{n} (j2\pi i/MT) = T \tilde{U} \left[i + \left(\frac{M}{2} - 1 \right) n \right] \left(\frac{2\pi}{M} \right)^{(n-1)} \quad i = 0, \dots, \frac{M}{2} \\ \{ \tilde{U}(0), \dots, \tilde{U}[n(M-1)] \} = \text{Conv} \left\{ \underbrace{[\tilde{U}(0), \dots, \tilde{U}(M-1)]}_{n}, \dots, [\tilde{U}(0), \dots, \tilde{U}(M-1)] \right\} \\ \tilde{U}(i) = \left| U_d \left[j \frac{2\pi}{M} \left(i - \frac{M}{2} + 1 \right) \right] \right|, \quad i = 0, 1, \dots, M-1 \end{array} \right.$$

for $n = N_0, \dots, N$, where $\text{Conv}(\cdot)$ denotes the convolution operation and $\tilde{U}(\cdot)$ and $\tilde{\tilde{U}}(\cdot)$ represent the intermediate results of this algorithm.

(iv) Based on the $(i_d - i_c + 1)$ equations

$$Y^{*} \left(\frac{2\pi}{MT} i \right) = \sum_{n=N_0}^N \frac{1}{(2\pi)^{(n-1)}} C_n \underbrace{|U|^* \dots |U|}_{n} \left[j \left(\frac{2\pi}{MT} i \right) \right] \quad i = i_c, i_c + 1, \dots, i_d$$

where $i_c = \text{round} \left[\frac{cMT}{2\pi} \right]$, $i_d = \text{round} \left[\frac{dMT}{2\pi} \right]$, and $\text{round}(x)$

means to take the integer nearest to x , use a least squares routine to compute

$$C_n, \quad n = N_0, \dots, N,$$

under the constraint that the results must be positive, and then select the NARX model parameters

$$K_n, C_{0n}(l_1, \dots, l_n), \quad l_1 = 1, \dots, K_n, \dots, l_n = 1, \dots, K_n$$

for $n = N_0, \dots, N$

under the constraints on the summation of the modulus of the coefficients given by

$$C_n = \sum_{l_1=1}^{K_1} \dots \sum_{l_n=1}^{K_n} |c_{0n}(l_1, \dots, l_n)|, \quad n = N_0, \dots, N$$

- (v) If necessary, design a classical linear filter, for example, a band pass filter which ideally allows the frequency response to be unity over the frequency band $[c, d]$ and zero beyond to yield the linear frequency characteristic

$$\frac{1}{1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp(-j\omega l_1)}$$

and therefore determine the parameters associated with K_1 , $c_{10}(l_1)$, $l_1 = 1, \dots, K_1$. Otherwise, all of the parameters of $c_{10}(\cdot)$ can be taken as zero to yield a model having no regression terms associated with the output.

- (5) Construct a NARX model as shown in figure (14) using the results obtained in the above (iv) and (v). The nonlinear system illustrated in figure 14 comprises a nonlinear part 1400 and a linear part 1402. It will be appreciated that in figure 14

$$\sum_{l_1, l_2=1}^{K_1, K_2} c_{20}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i) = \sum_{l_1=1}^{K_1} \dots \sum_{l_n=1}^{K_n} c_{20}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i)$$

II.2.2 Three Specific Examples

Example 1

This example illustrates a further implementation or design of a nonlinear system following the above detailed procedure.

- (1) The signal to be processed is given by

$$u(t) = 2M_u \frac{1}{2\pi} \frac{\sin \alpha t - \sin \beta t}{t}$$

with $\alpha = 3.3$, $\beta = 1$, and $M_u = 1.6$. The frequency spectrum $U(j\omega)$ of the signal is shown in figure 15 indicating that the real input frequency range is $[1, 3.3]$. The requirement for the design is to transfer energy of the original signal to the frequency band $[c, d] = [5.6, 7.6]$ with the bound

on the output spectrum magnitude specified to be $Y^B(w)=1.6$ over this frequency band.

- (2) Sample $u(t)$ with sampling interval $T=0.01\text{sec}$ to produce

$$u(k) = 2M_u \frac{1}{2\pi} \frac{\sin \alpha kT - \sin \beta kT}{kT} = 2 \times 1.6 \times \frac{1}{2\pi} \times \frac{\sin 3.3 \times 0.01k - \sin 0.01k}{0.01k}$$

$$k = -1999, \dots, 0, \dots, 2000$$

and perform a Fast Fourier Transform (FFT) on this series ($M=4000$) to compute

$$U_d\left(j\frac{2\pi}{M}l\right) = U_d\left(j\frac{2\pi}{4000}l\right) \quad l = -1999, \dots, 0, \dots, 2000$$

and then to yield

$$U\left(j\frac{2\pi}{MT}l\right) = U\left(j\frac{2\pi}{4000 \times 0.01}l\right) = 0.01 U_d\left(j\frac{2\pi}{4000}l\right) \quad l = -1999, \dots, 0, \dots, 2000$$

the result of which, in the nonnegative frequency range, is shown in figure 16.

Notice the difference between the real spectrum of $u(t)$ in figure 15 and the computed spectrum in figure 16. The differences are due to the errors caused by the FFT operation. The design should and will be performed based upon the computed spectrum to lead to more practical results.

- (3) Evaluate the frequency range $[a,b]$ of $u(t)$ from the computed spectrum giving

$$a = 0.6283 \quad b = 3.7699$$

- (4) Design the system structure and parameters

- (i) Determination of N_0 .

Clearly, the output frequency range contributed by the linear part when the input frequencies are within $[a,b]=[0.6283, 3.7699]$ is

$$f_x = [a,b] = [0.6283, 3.7699]$$

The frequency range f_x produced by the second order nonlinearity in this case is obtained as follows.

Since $n=2$,

$$\begin{aligned} \frac{nb}{(a+b)} - \left[\frac{na}{(a+b)} \right] &= \frac{2 \times 3.7699}{(3.7699 + 0.6283)} - \left[\frac{2 \times 0.6283}{(3.7699 + 0.6283)} \right] \\ &= 1.7143 - [0.2857] = 1.7143 - 0 > 1 \end{aligned}$$

and

$$i^* = \left[\frac{na}{(a+b)} \right] + 1 = \left[\frac{2 \times 0.6283}{3.7699 + 0.6283} \right] + 1 = [0.2857] + 1 = 0 + 1 = 1$$

So

$$\begin{aligned} f_x &= \bigcup_{i=0}^{i^*} I_i = \bigcup_{i=0}^{i^*-1} [na-i(a+b), nb-i(a+b)] \cup [0, nb-i^*(a+b)] \\ &= [na, nb] \cup [0, nb-(a+b)] = [2 \times 0.6283, 2 \times 3.7699] \cup [0, 2 \times 3.7699 - (0.6283 + 3.7699)] \\ &= [1.2566, 7.5398] \cup [0, 3.1416] = [0, 7.5398] \end{aligned}$$

f_x thereby obtained contains part of the specified output frequency range $[c,d] = [5.6, 7.6]$. So, N_0 is determined to be $N_0 = 2$.

(ii) Determination of N .

Evaluating $f_y = f_x \cup f_{x_{n-1}}$ for $n=2$ yields

$$f_y|_{n=2} = f_x \cup f_{x_1} = [0, 7.5398] \cup [0.6283, 3.7699] = [0, 7.5398]$$

To evaluate $f_y|_{n=3} = f_x \cup f_{x_2}$, calculate f_{x_2} first. In this case

$$\begin{aligned} \frac{nb}{(a+b)} - \left[\frac{na}{(a+b)} \right] &= \frac{3 \times 3.7699}{(3.7699 + 0.6283)} - \left[\frac{3 \times 0.6283}{(3.7699 + 0.6283)} \right] \\ &= 2.5714 - [0.4286] = 2.5714 - 0 > 1 \end{aligned}$$

$$i^* = \left[\frac{na}{(a+b)} \right] + 1 = \left[\frac{3 \times 0.6283}{3.7699 + 0.6283} \right] + 1 = [0.4286] + 1 = 0 + 1 = 1$$

So

$$\begin{aligned} f_{x_2} &= \bigcup_{i=0}^{i^*} I_i = I_0 \cup I_1 = [na, nb] \cup [0, nb-(a+b)] \\ &= [3 \times 0.6283, 3 \times 3.7699] \cup [0, 3 \times 3.7699 - (0.6283 + 3.7699)] \\ &= [1.8848, 11.3097] \cup [0, 6.9115] = [0, 11.3097] \end{aligned}$$

Therefore

$$f_y|_{n=3} = f_x \cup f_{x_2} = [0, 7.5398] \cup [0, 11.3097] = [0, 11.3097]$$

$f_y|_{n=3}$ thereby obtained includes the whole specified output frequency range $[5.6, 7.6]$. N is therefore determined to be $N=3$.

(iii) Calculate $\underbrace{|U| * \dots * |U|}_{n} (j\omega)$ for $n=N_0=2$ and $n=N=3$, respectively to yield

$$\underbrace{|U^* \cdot U(j2\pi i/M)|}_n = \underbrace{|U^* \cdot U(j2\pi i/4000 \times 0.01)|}_n \quad i=0, \dots, 4000/2, n=2 \text{ and } 3$$

The results are shown in figure 17.

(iv) Based on the $(i_d - i_c + 1)$ equations

$$\begin{aligned} Y^{*}(\pi i/2000 \times 0.01) &= 1.6 = \frac{1}{2\pi} C_2 |U^*| |U(j\pi i/2000 \times 0.01)| \\ &+ \frac{1}{(2\pi)^2} C_3 |U^*| |U| |U(j\pi i/2000 \times 0.01)| \\ i &= i_c, i_{c+1}, \dots, i_{d-1}, i_d \end{aligned}$$

with

$$i_c = \text{round}[cMT/2\pi] = \text{round}[5.6 \times 4000 \times 0.01/2 \times \pi] = 36$$

$$i_d = \text{round}[dMT/2\pi] = \text{round}[7.6 \times 4000 \times 0.01/2 \times \pi] = 48$$

use a least squares routine under the constraint of nonnegative solutions to compute C_2 and C_3 , that is, to determine C_2 and C_3 , under the constraints of $C_2 \geq 0$ and $C_3 \geq 0$, to minimise the following expression

$$\sum_{i=1}^{i_d} \left[1.6 - \frac{1}{2\pi} C_2 |U^*| |U(j\pi i/2000 \times 0.01)| - \frac{1}{(2\pi)^2} C_3 |U^*| |U| |U(j\pi i/2000 \times 0.01)| \right]^2$$

The results obtained are

$$C_2 = 0 \quad \text{and} \quad C_3 = 3.8367$$

(v) Design, optionally, a linear Butterworth band pass filter to attenuate the frequency components beyond the frequency band $[c, d] = [5.6, 7.6]$ to yield the linear frequency characteristic

$$\frac{10^{-3}(0.0986 - 0.1972q^{-2} + 0.0986q^{-4})}{1 - 3.9633q^{-1} + 5.8988q^{-2} - 3.9076q^{-3} + 0.9721q^{-4}} \bigg|_{q=e^{j\omega}}$$

(5) Construct a NARX model as shown in figure 14 with

$$N_0 = 2, N = 3, K_2 = K_3 = 1, c_{02}(1, 1) = 0, c_{03}(1, 1, 1) = 3.8367,$$

that is,

$$\begin{aligned} \sum_{n=N_0}^N \sum_{l_1=1}^{K_1} \dots \sum_{l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i) &= \sum_{l_1=1}^{K_1} \sum_{l_2=1}^{K_2} c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i) + \\ &\sum_{l_1=1}^{K_1} \sum_{l_2=1}^{K_2} \sum_{l_3=1}^{K_3} c_{03}(l_1, l_2, l_3) \prod_{i=1}^3 u(k-l_i) \end{aligned}$$

$$= \sum_{l_1=1}^1 \sum_{l_2=1}^1 c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i) +$$

$$\sum_{l_1=1}^1 \sum_{l_2=1}^1 \sum_{l_3=1}^1 c_{03}(l_1, l_2, l_3) \prod_{i=1}^3 u(k-l_i)$$

$$= c_{02}(1, 1) u^2(k-1) + c_{03}(1, 1, 1) u^3(k-1) = 0 \times u^2(k-1) + 3.8367 u^3(k-1) = 3.8367 u^3(k-1)$$

and

$$\left[1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) q^{-1} \right]^{-1} = \frac{10^{-3}(0.0986 - 0.1972q^{-2} + 0.0986q^{-4})}{1 - 3.9633q^{-1} + 5.8988q^{-2} - 3.9076q^{-3} + 0.9721q^{-4}}$$

which determines the parameters associated with the NARX model parameters K_1 and $c_{10}(l_1)$, $l_1 = 1, \dots, K_1$.

The output frequency response under the given input is shown in figure 18 indicating that the energy has been transferred to the specified frequency band $[c, d] = [5.6, 7.6]$ with the magnitude of the response below the specified bound 1.6.

The frequency response of the above design is examined for other input signals below.

In the first case, consider

$$u(t) = \frac{2M_u}{\pi(b-a)t^2} \left[2 \cos \frac{(a+b)t}{2} - \cos bt - \cos at \right]$$

where a , b , and M_u are defined as above. The frequency spectrum of the signal is shown in figure 19. The frequency range is clearly the same as that of the signal having the spectrum given in figure 15 and the magnitude of the spectrum also satisfies the condition that

$$|U(j\omega)| \leq M_u = 1.6$$

This implies that the frequency response of the designed system to this $u(t)$ should in theory also transfer energy into the frequency band $[c, d] = [5.6, 7.6]$ with the output magnitude frequency response being less than $Y^B(\omega) = 1.6$ over this frequency band. Figure 20 shows this frequency response and indicates that the actual result is consistent with the theoretical predictions.

For the second case, $u(t)$ was taken as a random process with the frequency spectrum given in figure 21. The frequency spectrum is substantially within the frequency range $[1, 3]$

with a magnitude of less than 1.6. Therefore, the same conclusion should apply for the output magnitude frequency response of the designed system to this random input. Figure 22 shows this response and indicates that the energy is transferred to a new frequency band of substantially [5.6, 7.6]. Note that the magnitude of the output spectrum over this frequency band is well below the specified bound $Y^B(w)=1.6$. This is because of the effect of the attenuation which is due to intrakernel interference of the nonlinear mechanism.

The nonlinear filter which has been designed above can be represented by the block diagram shown in figure 23. This could be realised electronically by following the approach used to realise Design 1 in figure 9. However, for some applications the design may need to be realised in continuous time. Using the bilinear transformation

$$q = \frac{1 + (T/2)s}{1 - (T/2)s}$$

where $T=0.01$ is the sampling interval, q^{-1} is the delay operator, and s is the Laplace Transform operator and substituting in the discrete time design in figure 23 provides the equivalent continuous time system shown in figure 24. Simulating the system in figure 24 produces almost identical responses as the discrete time system response of figure 18.

The system in figure 24 could for example be realised mechanically as illustrated schematically in figure 25 where the cubic device is either a material which exhibits a cubic response or is implemented as an actuator which takes $u_1(t)$ as input and produces an actuation output $u_2(t)$ which is proportional to the cubic power of the input.

One possible application of this design would be in vibration isolation. For example it may be required to transfer energy from an input frequency range [1,3.3] to the frequency range [5.6,7.6]. The new design could be used to achieve this effect.

Other much more complicated designs for vibration isolation can be achieved based on the present invention. The design procedure would be exactly as described above but the realisation would involve the synthesis of dampers, damping materials or actuators with the nonlinear dynamic characteristics specified by the designs.

Example 2

Example 2 shows an application of the design above to the attenuation of signal energy over unwanted frequency bands using designed nonlinear effects.

When using linear structures for the attenuation of signal energy in a physical system, the attenuated energy is usually absorbed by devices such as dampers in mechanical systems and resistors in electronic circuits and transformed to other energy forms such as thermal energy. This may lead to undesirable effects and measures, such as using radiating devices, sometimes have to be taken to compensate for these effects. When a nonlinear system is employed, instead of attenuating the signal energy directly as in the linear case, the signal energy at a frequency of interest can be spread over a wider frequency band and attenuated by means of the counteractions between different terms which compose the output spectrum. This means that, to a certain extent, a nonlinear design for signal energy attenuation can reduce the requirements for using energy absorption devices and is of great benefit in practical applications.

Another important application would be, for example, in the design of the foundations or the modification of the characteristics of buildings and structures which are in earthquake zones. The objective in such an application would be to design materials or actuators, tuned as required for each structure, which transfer the damaging input energy from an earthquake to another more acceptable frequency band or spread the energy to be within an acceptable bound over a desired frequency range. Spreading the energy using the present design should produce significant reductions in earthquake damage.

- (1) Design a nonlinear system to attenuate the energy of the signal

$$u(t) = \frac{2M_u}{\pi(a-b)t^2} \left[2\cos\left(\frac{a+b}{2}t\right) - \cos a t - \cos b t \right]$$

where $a=3.3$, $b=1$, $M_u=1.6$.

- (2) The spectrum of the signal is evaluated. This is implemented by sampling the signal with sampling interval $T=0.01\text{sec}$ to produce

$$u(k) = \frac{2M_u}{\pi(\alpha - \beta)(kT)^2} \left[2\cos\left(\frac{\alpha + \beta}{2}kT\right) - \cos \alpha kT - \cos \beta kT \right]$$

$k = -1999, \dots, 0, \dots, 2000$

and perform a Fast Fourier Transform (FFT) on this series. The result of the FFT is shown in figure 26.

- (3) Evaluate the range $[a,b]$ of frequencies in the signal based on the computed spectrum. The evaluation gives

$a=1.0996$ $b=3.1416$

This is because the computed spectrum indicates

$$|U(jw)| \geq 0.05 \quad \text{for } w \in [1.0996, 3.1416]$$

and

$$|U(jw)| < 0.05 \quad \text{for other } w$$

- (4) Assume that, as part of the design, output frequency range is $[c,d]=[0, 7.3]$ and the required bound over this frequency band is $Y^{B^*}(w)=1$.
- (5) Following the same steps for the design of the system structure and parameters as in example 1 above, N_0 , N , and C_n , $n=N_0, \dots, N$ were determined as follows.

(i) N_0

N_0 is determined to be $N_0=1$. This is because

$$f_x = [a,b] = [1.0996, 3.1416] \in [0, 7.3] = [c, d]$$

where f_x denotes the output frequency band contributed by the system linear part, and part of the selected output frequency range falls into the linear output frequency range f_x .

(ii) N

In this case, it can be obtained using $a=1.0990$ and $b=3.1416$ that

$$f_x = [2.1992, 6.2832] \cup [0, 2.0420]$$

$$f_x = [0, 9.4248]$$

Thus, if the maximum nonlinear order is taken to be 2, then the output frequency range of the system is

$$f_y|_{n=2} = f_x \cup f_x = [0, 6.2832]$$

If the maximum order is taken to be 3, then the output frequency range

$$f_y|_{n=3} = f_x \cup f_x = [0, 9.4248]$$

Clearly, $f_y|_{n=3}$ contains the whole selected output frequency range $[c,d]=[0,7.3]$, N is therefore determined to be $N=3$.

(iii) C_n , $n=1,2,3$.

C_n , $n=1,2,3$. are determined to minimize the following expression

$$\sum_{i=1}^3 \left[1 - C_i |U(j2\pi i/MT)| - \frac{1}{2\pi} C_2 |U^*|U(j2\pi i/MT)| - \frac{1}{(2\pi)^2} C_3 |U^*|U^*|U(j2\pi i/MT)| \right]^2$$

under the constraints of $C_i \geq 0$, $i=1,2,3$.

Notice that for this specific example,

$$M = 4000$$

$$i_c = \text{round}\left[\frac{\text{CMT}}{2\pi}\right] = \text{round}\left[\frac{0 \times 4000 \times 0.01}{2\pi}\right] = 0$$

$$i_d = \text{round}\left[\frac{\text{dMT}}{2\pi}\right] = \text{round}\left[\frac{7.6 \times 4000 \times 0.01}{2\pi}\right] = 48$$

The solution to this minimisation problem is

$$C_1 = 0, C_2 = 2.1932, C_3 = 6.0550$$

(6) Select the NARX model parameters

$$K_n, c_{0n}(l_1, \dots, l_n), l_1 = 1, \dots, K_n, \dots, l_n = 1, \dots, K_n, \text{ for } n = N_0, \dots, N,$$

based on the results obtained in (5) as

$$K_1 = K_2 = K_3 = 2$$

$$c_{01}(\cdot) = 0,$$

$$c_{02}(1,1) = 1.1932, c_{02}(1,2) = c_{02}(2,1) = 0, c_{02}(2,2) = -1,$$

$c_{03}(1,1,1) = 3.0550, c_{03}(2,2,2) = -3$, and other $c_{03}(\cdot)$'s are zero and consequently construct a NARX model as

$$\begin{aligned} y(k) &= \sum_{n=N_0}^N \sum_{l_1=1}^{K_n} \dots \sum_{l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i) = \sum_{l_1=1}^{K_1} c_{01}(l_1) u(k-l_1) + \\ &\quad \sum_{l_1=1}^{K_2} \sum_{l_2=1}^{K_2} c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i) + \sum_{l_1=1}^{K_3} \sum_{l_2=1}^{K_3} \sum_{l_3=1}^{K_3} c_{03}(l_1, l_2, l_3) \prod_{i=1}^3 u(k-l_i) \\ &= \sum_{l_1=1}^2 c_{01}(l_1) u(k-l_1) + \sum_{l_1=1}^2 \sum_{l_2=1}^2 c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i) + \sum_{l_1=1}^2 \sum_{l_2=1}^2 \sum_{l_3=1}^2 c_{03}(l_1, l_2, l_3) \prod_{i=1}^3 u(k-l_i) \\ &= c_{02}(1,1) u^2(k-1) + c_{02}(2,2) u^2(k-2) + c_{03}(1,1,1) u^3(k-1) + c_{03}(2,2,2) u^3(k-2) \\ &= 1.1932 u^2(k-1) - u^2(k-2) + 3.0550 u^3(k-1) - 3 u^3(k-2) \end{aligned}$$

Notice that the selected NARX model parameters satisfy the relationship

$$\sum_{l_1=1}^{K_1} |c_{01}(l_1)| = 0 = C_1$$

$$\sum_{l_1=1}^{K_2} \sum_{l_2=1}^{K_2} |c_{02}(l_1, l_2)| = |c_{02}(1,1)| + |c_{02}(2,2)| = |1.1932| + |-1| = 2.1932 = C_2$$

$$\sum_{l_1=1}^{K_3} \sum_{l_2=1}^{K_3} \sum_{l_3=1}^{K_3} |c_{03}(l_1, l_2, l_3)| = |c_{03}(1,1,1)| + |c_{03}(2,2,2)| = |3.0550| + |-3| = 6.0550 = C_3$$

and the different signs selected for

$$c_{02}(1,1) \text{ and } c_{02}(2,2)$$

and for

$$c_{03}(1,1,1) \text{ and } c_{03}(2,2,2)$$

are such as to give effect to the intra-kernel and inter-kernel interferences, which is to attenuate the energy of the input signal.

The frequency domain response of the constructed model to the sampled series of the input signal is shown in figure 27. It can be seen that excellent energy attenuation has been achieved by the designed system. It will be appreciated that the input energy in figure 26 has been spread over the designed frequency band by the nonlinear filter.

Example 3

This example shows another application of the present invention to the attenuation of signal energy over unwanted frequency bands using designed nonlinear effects. The example also illustrates the effect of the same design on a different input signal to demonstrate the effectiveness in energy attenuation of the designed system in different circumstances.

- (1) Design a nonlinear system to attenuate the energy of the signal

$$u(t) = 2M_u \frac{1}{2\pi} \frac{\sin \alpha t - \sin \beta t}{t}$$

with $\alpha = 3.3$, $\beta = 1$, and $M_u = 1.6$.

- (2) The spectrum of the signal is evaluated by sampling the signal with sampling interval $T = 0.01$ sec to produce

$$u(k) = 2M_u \frac{1}{2\pi} \frac{\sin \alpha kT - \sin \beta kT}{kT} = 2 \times 1.6 \times \frac{1}{2\pi} \times \frac{\sin 3.3 \times 0.01k - \sin 0.01k}{0.01k}$$

$$k = -1999, \dots, 0, \dots, 2000$$

and then performing a Fast Fourier Transform (FFT) on the obtained time series. The result of the FFT is the same as that shown in figure 16.

- (3) Evaluating the range $[a, b]$ of frequencies in the signal based on the computed spectrum gives

$$a = 0.6283 \quad b = 3.7699$$

as the computed spectrum indicates

$$|U(jw)| \geq 0.05 \quad \text{for } w \in [0.6283, 3.7699]$$

and

$$|U(jw)| < 0.05 \quad \text{for other } w.$$

- (4) Assume that, as part of the design, it is desired that the output frequency range is $[c, d] = [0, 10.3]$ and the required bound over this frequency range is $Y^{**}(w) = 1$.

- (5) Following the same steps for the design of the system structure and parameters as in example 1 above, the parameters N_0 , N , and C_n , $n=N_0, \dots, N$ are determined as follows.

(i) N_0

N_0 is determined to be $N_0=1$ due to

$$f_{y_1} = [a, b] = [0.6283, 3.7699] \in [0, 10.3] = [c, d],$$

which indicates that part of the selected output frequency range falls into the linear output frequency range f_{y_1} .

(ii) N

In this example, N is obtained using $a=0.6283$ and $b=3.7699$. Therefore,

$$f_{y_2} = [0, 7.5398]$$

$$f_{y_3} = [0, 11.3097].$$

Hence, if the maximum nonlinear order is taken to be 2, the output frequency range of the system is

$$f_{y|n=2} = f_{y_2} \cup f_{y_3} = [0, 7.5398].$$

If the maximum order is taken to be 3, the output frequency range

$$f_{y|n=3} = f_{y_3} \cup f_{y_4} = [0, 11.3097].$$

As $f_{y|n=3}$ contains the whole selected output frequency range $[c, d] = [0, 7.6]$, N , for the design, is determined to be $N=3$.

(iii) C_n , $n=1, 2, 3$

C_n , $n=1, 2, 3$ are determined in such a manner as to minimise

$$\sum_{i=1}^3 \left[1 - C_i \left| U(j2\pi/MT) \right| - \frac{1}{2\pi} C_2 \left| U^* U(j2\pi/MT) \right| - \frac{1}{(2\pi)^2} C_3 \left| U^* U^* U(j2\pi/MT) \right| \right]^2$$

under the constraints of $C_i \geq 0$, $i=1, 2, 3$. In this case also $M=4000$ but

$$i_c = \text{round} \left[\frac{cMT}{2\pi} \right] = \text{round} \left[\frac{0 \times 4000 \times 0.01}{2\pi} \right] = 0$$

$$i_d = \text{round} \left[\frac{dMT}{2\pi} \right] = \text{round} \left[\frac{10.3 \times 4000 \times 0.01}{2\pi} \right] = 66$$

The solution to this minimisation problem is

$$C_1 = 0, C_2 = 0.2928, C_3 = 0.9763$$

(6) The NARX model parameters

$$K_n, C_{0n}(l_1, \dots, l_n), l_1 = 1, \dots, K_n, \dots, l_n = 1, \dots, K_n, \text{ for } n = N_0, \dots, N,$$

are selected based on the results obtained in (5) as

$$K_1 = K_2 = K_3 = 2$$

$$c_{01}(\cdot) = 0$$

$$c_{02}(1,1) = 0.1928, c_{02}(1,2) = -0.1, c_{02}(2,1) = 0, c_{02}(2,2) = 0,$$

$$c_{03}(1,1,1) = 0.6763, c_{03}(1,2,2) = -0.3, \text{ and other } c_{03}(\cdot) \text{'s are zero.}$$

and consequently a NARX model is constructed

$$\begin{aligned} y(k) &= \sum_{n=N_0}^N \sum_{l_1=1}^{K_1} \cdots \sum_{l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i) \\ &= \sum_{l_1=1}^2 c_{01}(l_1) u(k-l_1) + \sum_{l_1=1}^2 \sum_{l_2=1}^2 c_{02}(l_1, l_2) \prod_{i=1}^2 u(k-l_i) + \sum_{l_1=1}^2 \sum_{l_2=1}^2 \sum_{l_3=1}^2 c_{03}(l_1, l_2, l_3) \prod_{i=1}^3 u(k-l_i) \\ &= c_{02}(1,1) u^2(k-1) + c_{02}(1,2) u(k-1) u(k-2) + c_{03}(1,1,1) u^3(k-1) \\ &\quad + c_{03}(1,2,2) u(k-1) u^2(k-2) \\ &= 0.1928 u^2(k-1) - 0.1 u(k-1) u(k-2) + 0.6763 u^3(k-1) - 0.3 u(k-1) u^2(k-2) \end{aligned}$$

The selected NARX model parameters satisfy the relationships

$$\sum_{l_1=1}^{K_1} |c_{01}(l_1)| = 0 = C_1$$

$$\sum_{l_1=1}^{K_1} \sum_{l_2=1}^{K_2} |c_{02}(l_1, l_2)| = |c_{02}(1,1)| + |c_{02}(1,2)| = |0.1928| + |-0.1| = 0.2928 = C_2$$

$$\sum_{l_1=1}^{K_1} \sum_{l_2=1}^{K_2} \sum_{l_3=1}^{K_3} |c_{03}(l_1, l_2, l_3)| = |c_{03}(1,1,1)| + |c_{03}(1,2,2)| = |0.6763| + |-0.3| = 0.9763 = C_3$$

and the different signs selected for

$$c_{02}(1,1) \text{ and } c_{02}(1,2)$$

and for

$$c_{03}(1,1,1) \text{ and } c_{03}(1,2,2)$$

are in order to give effect to the intra-kernel and inter-kernel interferences, which is to attenuate the energy of the input signal.

The frequency response of the constructed model to the input signal specified above is shown in figure 28 which indicates that the required energy attenuation has been realised.

The frequency response of the design above to the input signal in example 2 gives the result shown in figure 29. The nonlinear system design above clearly also works for the signal in example 2 in energy attenuation although the model was not specially designed for this signal. This is reasonable since the magnitude of the spectrum of the signal in example 2 is less than the magnitude of the spectrum of the signal in this example over almost all of the input frequency band and over the other frequency bands the magnitudes of the spectra of the two signals are all zero. This illustrates that the above design is effective not only for the input based on

which the design is implemented but also for other inputs with magnitude frequency characteristics less than the magnitude of the spectrum of the considered input.

III. FLOWCHARTS

Referring to figure 30, there is shown a flow chart 3000 depicting the steps of an embodiment of the present invention in which the output spectrum is specified over a given range of output frequencies.

The signal to be processed and the desired frequency response of the non-linear system to be designed are input via steps 3002 to 3006.

At step 3002, a digital input signal $\{u(k)\}$ and its sampling period T are to be provided. The range of output frequencies $[c,d]$ over which the energy of the input signal is to be transformed is given in step 3004. The output frequency range is specified using beginning and end frequencies c and d respectively. The distribution of the energy over the output frequency range $[c,d]$ is requested or specified in step 3006.

The frequency characteristics of the input signal are determined at steps 3008 and 3010. More particularly, the frequency components of the digitised input signal, $\{u(k)\}$, are calculated using a Fast Fourier Transform at step 3008. The range of frequency components contained within the input signal is determined from the FFT at step 3010.

Referring to steps 3012 to 3024, the orders of the nonlinearities required to realise a desired nonlinear system and, hence, the energy transformation, are calculated.

Variables n and N_0 are set to one and zero respectively at step 3012. The output frequency components resulting from the n th-order of system nonlinearities are determined at steps 3014 and 3016.

A determination is made at step 3018 as to whether or not $N_0=0$, that is to say, whether or not the smallest order of system nonlinearities which makes a contribution to the desired energy transformation has been determined. If N_0 is equal to zero, a determination is made at step 3020 as to whether or not part of the specified output frequency range falls within f_{yn} . If the determination is negative, processing continues at step 3026 at which the value of n is increased by one. However, if the determination is positive,

the value of N_0 is set to equal n at step 3022 and processing continues at step 3026.

If N_0 is not equal to zero, then a determination is made at step 3024 as to whether or not the specified output frequency range lies completely within $f_y = f_{yn} \cup f_{yn-1}$. If the determination is positive, processing continues with step 3027. However, if the determination is negative, the value of n is incremented by one at step 3026 and processing continues at step 3014.

Steps 3028 to 3034 determine the values of the time lags of the nonlinear model for all values of $n = N_0, N_0+1, \dots, N$ and determine the parameters of the nonlinear system to be designed.

Step 3036 represents a step for fine tuning of the output or frequency response of the designed non-linear system.

Steps 3038 and 3040 determine whether or not the resulting frequency response is sufficient to meet the design requirements. If the frequency response of the designed filter is acceptable, the discrete time version of the filter is output at step 3042. However, if the designed non-linear system does not have an acceptable frequency response, then step 3044 increments the value of K_n by one for all $n = N_0, N_0+1, \dots, N$ and steps 3030 to 3040 are iteratively repeated.

The determination in step 3040 as to whether or not the designed filter is acceptable is made, for example, by calculating the difference between the required output spectrum and the real output spectrum of the designed system over the frequency band $[c,d]$. If the modulus of the difference is below a predeterminable threshold over all the output frequency band $[c,d]$, then the designed nonlinear system may be deemed to be acceptable. However, if the modulus of the difference is greater than the threshold at any frequency over $[c,d]$, then the design is refined.

Referring to figure 31, there is shown a flow chart 3100 for implementing computer code according to a second embodiment of the present invention.

The signal to be processed and the specification for the desired bound to be imposed upon the output signal frequency characteristics is input at steps 3102 to 3106.

At step 3102, a digitised input signal and its sampling period T are to be provided. The range of output frequencies $[c,d]$ over which the energy of the input signal is to be transformed is specified in step 3104. A bound $yB^*(w)$ for the

distribution of the energy over the output frequency band $[c,d]$ is input at step 3106.

The frequency characteristics of the input signal are determined at step 3108 and 3110. More particularly, the frequency components of the digitised input signal, $\{u(k)\}$, are calculated using a Fast Fourier Transform at step 3108. The range of frequency components contained within the input signal is determined from the FFT at step 3110.

Referring to steps 3112 to 3124, the orders of the nonlinearities required to realise a desired nonlinear system and, hence, the energy transformation, are calculated.

Variables n and N_0 are set to one and zero respectively at step 3112. The frequency components resulting from the n th-order of system nonlinearities are determined at steps 3114 and 3116.

A determination is made at step 3118 as to whether or not $N_0 = 0$, that is to say, whether or not the smallest order of system nonlinearities which contributes to the desired energy transformation has been determined. If N_0 is equal to zero, a determination is made at step 3120 as to whether or not part of the specified output frequency range falls within f_{yn} . If the determination is negative, processing continues at step 3126 in which the value of n is increased by one. However, if the determination is positive, the value of N_0 is set to equal n at step 3122 and processing continues at step 3126.

If, at step 3118, it is determined that N_0 is not equal to zero, then a determination is made at step 3124 as to whether or not the specified output frequency range lies completely within $f_y = f_{yn} \cup f_{yn-1}$. If the determination is positive, processing continues with step 3127. However, if the determination is negative, the value of n is incremented by one at step 3126 and processing continues at step 3114.

Steps 3128 to 3134 determine the values C_n for all values of $n = N_0, N_0+1, \dots, N$, which represents the summation of the modulus of the values of the parameters of the nonlinear system.

At step 3136 the parameters of a NARX model are selected given the constraints imposed upon the non-linear system obtained in steps 3128 to 3134. A determination is made via steps 3138 and 3140 as to whether or not the frequency response beyond the frequency band $[c,d]$ of the designed filter is acceptable. If the frequency response is acceptable, the filter design parameters are output at step 3142. However, if the filter characteristics are not acceptable at frequencies outside the frequency range $[c,d]$, then a

conventional filter, $H(q^{-1})$, is designed, at step 3144, in order to reduce or obviate the frequency response of the designed filter outside the range of frequencies $[c,d]$. Finally, the design is completed at step 3146 by combining the designed non-linear and linear filters, if any.

The determination in step 3140 as to whether or not the frequency response of the designed filter is acceptable outside the range of frequencies $[c,d]$ is made, for example, by comparing the modulus of the frequency response beyond the frequency range $[c,d]$ with a predeterminable threshold. If the modulus is below the threshold over all the frequency range outside $[c,d]$, then the designed nonlinear system may be deemed to be acceptable. However, if the modulus is greater than the threshold at any frequency beyond $[c,d]$, the design is refined.

Referring to figure 32 there is shown a data processing system upon which embodiments of the present invention, that is to say, the non-linear systems and the methods of design thereof can be implemented or realised. It will also be appreciated that the non-linear systems so designed may be implemented in digital form using the data processing system or other suitable hardware and software. The data processing system 3200 comprises a central processing unit 3202 for processing computer instructions for implementing the design of nonlinear systems given an input signal and particular output signal requirements. The data processing system also comprises a memory 3204 for storing data to be processed or the results of processing as well as computer program instructions for processing such data, a system bus 3206, an input device 3208, an output device 3210 and a mass storage device, for example, a hard disc drive 3212.

CLAIMS

1. A method for designing a non-linear system for transferring energy from an input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to an output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said method comprising the steps of

identifying the first spectrum of the input signal from which energy is to be transferred,

specifying the second spectrum of the output signal to which said energy is to be transferred, and

calculating, using a frequency domain description of said output spectrum expressed in terms of a frequency domain description of said input signal and coefficients of a time domain description of a generalised non-linear system, the coefficients of the time domain description of the generalised non-linear system in order to give effect to the energy transfer.

2. A method as claimed in claim 1, wherein the frequency domain description of the input signal is $U(jw)$, the time domain description of said generalised non-linear system is given by the generalised NARX model

$$y(k) = \sum_{n=1}^N y_n(k) \quad (C1)$$

where

$$y_n(k) = \sum_{p=0}^n \sum_{l_1, \dots, l_{p+q}=1}^{K_n} c_{pq}(l_1, \dots, l_{p+q}) \prod_{i=1}^p y(k-l_i) \prod_{i=p+1}^{p+q} u(k-l_i) \quad (C2)$$

with

$$p+q=n, \quad l_i=1, \dots, K_n, \quad i=1, \dots, p+q, \quad \text{and} \quad \sum_{l_1, \dots, l_{p+q}=1}^{K_n} \equiv \sum_{l_1=1}^{K_n} \dots \sum_{l_{p+q}=1}^{K_n}$$

the frequency domain description of the output of the the generalised non-linear system is given by

$$Y(jw) = \sum_{n=1}^{\bar{N}} Y_n(jw) \quad (C3)$$

where

$$Y_n(jw) = \frac{1/\sqrt{n}}{(2\pi)^{n-1}} \int_{w_1 + \dots + w_n = w} H_n(jw_1, \dots, jw_n) \prod_{i=1}^n U(jw_i) d\sigma_w \quad (C4)$$

\bar{N} is the maximum order of dominant system nonlinearities,

$$\int (.) d\sigma_w$$

$w_1 + \dots + w_n = w$

denotes an integration over the n th-dimensional hyper-plane $w_1, \dots, w_n = w$, and $H_n(jw_1, \dots, jw_n)$, $n=1, \dots, \bar{N}$ are generalised frequency response functions of the the non-linear system.

3. A method as claimed in claim 2, wherein the mapping from the time domain description of the generalised non-linear system to the frequency domain description of the system is given as

$$\begin{aligned} & \left\{ 1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp[-j(w_1 + \dots + w_n) l_1] \right\} H_n(jw_1, \dots, jw_n) \\ &= \sum_{l_1, l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \exp[-j(w_1 l_1 + \dots + w_n l_n)] \\ &+ \sum_{q=1}^{n-1} \sum_{p=1}^{n-q} \sum_{l_1, l_{p+q}=1}^{K_{p+q}} c_{pq}(l_1, \dots, l_{p+q}) \exp[-j(w_{n-q+1} l_{p+1} + \dots + w_n l_{p+q})] H_{n-q,p}(jw_1, \dots, jw_{n-q}) \\ &+ \sum_{p=2}^n \sum_{l_1, l_p=1}^{K_p} c_{p0}(l_1, \dots, l_p) H_{n,p}(jw_1, \dots, jw_n) \end{aligned} \quad (C5)$$

where

$$H_{np}(jw_1, \dots, jw_n) = \sum_{i=1}^{n-p+1} H_i(jw_1, \dots, jw_i) H_{n-i,p-1}(jw_{i+1}, \dots, jw_n) \exp[-j(w_1 + \dots + w_i) l_p] \quad (C6)$$

4. A method as claimed in claim 3, wherein the relationship between the input and output frequencies or frequency ranges is given by the following

$$f_y = f_{y_n} \cup f_{y_{n-1}} \quad (C7)$$

where f_y denotes the range of frequencies of the output, and f_{y_n} and $f_{y_{n-1}}$ denote the ranges of frequencies produced by the \bar{N} th-order and $(\bar{N}-1)$ th-order nonlinearities, and

$$f_{y_n} = \begin{cases} \bigcup_{k=0}^{i^*-1} I_k & \text{when } \frac{nb}{(a+b)} - \left\lfloor \frac{na}{(a+b)} \right\rfloor < 1 \\ \bigcup_{k=0}^{i^*} I_k & \text{when } \frac{nb}{(a+b)} - \left\lfloor \frac{na}{(a+b)} \right\rfloor \geq 1 \end{cases} \quad (C8)$$

where $[.]$ relates to or means take the integer part,

$$i^* = \left\lfloor \frac{na}{(a+b)} \right\rfloor + 1$$

$$I_k = [na - k(a+b), nb - k(a+b)] \quad \text{for } k=0, \dots, i^*-1,$$

$$I_{i^*} = [0, nb - i^*(a+b)],$$

and the frequencies of the signal to be processed are in the range $[a, b]$. Given $[a, b]$ and the required output frequency

range f_y , the method further comprises the step of determining the smallest \bar{N} from the relationship above for the generalised non-linear system which can bring about the specified frequency domain energy transformation.

5. A method as claimed in claim 4, wherein, with \bar{N} having been determined and $K_n, n=1, \dots, N$, being given a priori, the method further comprises the steps of:

taking N as \bar{N} and determining the coefficients of the time domain model of the generalised non-linear system from the description for the system output spectrum given in terms of the spectrum of the input signal and the coefficients of the time domain model of the said generalised non-linear system.

6. A method as claimed in claim 5, further comprising the steps of

substituting $H_n(jw_1, \dots, jw_n)$ given in (C5) into (C4), and substituting the resultant expression for $Y_n(jw)$ into (C3) to obtain the description for the system output spectrum in terms of a function of the spectrum of the input signal and the coefficients of the time domain model of the said generalised nonlinear system.

7. A method for realising or manufacturing a non-linear system for transferring energy from an input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to an output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, the method comprising the steps of

(a) designing the non-linear system using the method as claimed in any of claims 1 to 6; and

(b) materially producing the non-linear system so designed or using the non-linear system so designed to modify materially the transfer function of an existing linear or non-linear system.

8. A data processing system for designing a non-linear system for transferring energy from an input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to an output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said system comprising

means for identifying the first spectrum of the input signal from which energy is to be transferred,

means for specifying the second spectrum of the output signal to which said energy is to be transferred, and

means for calculating, using a frequency domain description of said output spectrum expressed in terms of a

frequency domain description of said input and coefficients of a time domain description of a generalised non-linear system, the coefficients of a said time domain description of said generalised non-linear system in order to give effect to the energy transfer.

9. A system as claimed in claim 8, wherein the frequency domain description of the input signal is $U(jw)$, the time domain description of the generalised non-linear system is given by the generalised NARX model

$$y(k) = \sum_{n=1}^N y_n(k) \quad (C9)$$

where

$$y_n(k) = \sum_{p=0}^n \sum_{l_1, l_{p+q}=1}^{K_n} c_{pq}(l_1, \dots, l_{p+q}) \prod_{i=1}^p y(k-l_i) \prod_{i=p+1}^{p+q} u(k-l_i) \quad (C10)$$

with

$$p+q=n, \quad l_i=1, \dots, K_n, \quad i=1, \dots, p+q, \quad \text{and} \quad \sum_{l_1, l_{p+q}=1}^{K_n} \equiv \sum_{l_1=1}^{K_n} \dots \sum_{l_{p+q}=1}^{K_n}$$

the frequency domain description of the output of the the generalised non-linear system is given by

$$Y(jw) = \sum_{n=1}^N Y_n(jw) \quad (C11)$$

where

$$Y_n(jw) = \frac{1/\sqrt{n}}{(2\pi)^{n-1}} \int_{w_1+\dots+w_n=w} H_n(jw_1, \dots, jw_n) \prod_{i=1}^n U(jw_i) d\sigma_n \quad (C12)$$

\bar{N} is the maximum order of dominant system nonlinearities,

$$\int_{w_1+\dots+w_n=w} (.) d\sigma_n$$

denotes an integration over the n th-dimensional hyper-plane $w_1+\dots+w_n=w$, and $H_n(jw_1, \dots, jw_n)$, $n=1, \dots, \bar{N}$ are generalised frequency response functions of the said non-linear system.

10. A system as claimed in claim 9, wherein the mapping from the time domain description of the generalised non-linear system to the frequency domain description of the system is given as

$$\begin{aligned}
& \left\{ 1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp[-j(w_1 + \dots + w_n) l_1] \right\} H_n(jw_1, \dots, jw_n) \\
&= \sum_{l_1, l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \exp[-j(w_1 l_1 + \dots + w_n l_n)] \\
&+ \sum_{q=1}^{n-1} \sum_{p=1}^{n-q} \sum_{l_1, l_{p+q}=1}^{K_{p+q}} c_{pq}(l_1, \dots, l_{p+q}) \exp[-j(w_{n-q+1} l_{p+1} + \dots + w_n l_{p+q})] H_{n-q,p}(jw_1, \dots, jw_{n-q}) \\
&+ \sum_{p=2}^n \sum_{l_p=1}^{K_p} c_{p0}(l_1, \dots, l_p) H_{n,p}(jw_1, \dots, jw_n)
\end{aligned} \tag{C13}$$

where

$$H_{np}(jw_1, \dots, jw_n) = \sum_{i=1}^{n-p+1} H_i(jw_1, \dots, jw_i) H_{n-i,p-1}(jw_{i+1}, \dots, jw_n) \exp[-j(w_1 + \dots + w_i) l_p] \tag{C14}$$

11. A system as claimed in claim 10, wherein the relationship between the input and output frequencies or frequency ranges is given by the following

$$f_y = f_{y_n} \cup f_{y_{n-1}} \tag{C15}$$

where f_y denotes the range of frequencies of the output, and f_{y_n} and $f_{y_{n-1}}$ denote the ranges of frequencies produced by the \bar{N} th-order and $(\bar{N}-1)$ th-order nonlinearities, and

$$f_{y_n} = \begin{cases} \bigcup_{k=0}^{i^*-1} I_k & \text{when } \frac{nb}{(a+b)} - \left[\frac{na}{(a+b)} \right] < 1 \\ \bigcup_{k=0}^{i^*} I_k & \text{when } \frac{nb}{(a+b)} - \left[\frac{na}{(a+b)} \right] \geq 1 \end{cases} \tag{C16}$$

where $[.]$ relates to or means take the integer part, $n = \bar{N}$ and $\bar{N}-1$

$$i^* = \left[\frac{na}{(a+b)} \right] + 1$$

$$I_k = [na - k(a+b), nb - k(a+b)] \quad \text{for } k = 0, \dots, i^* - 1,$$

$$I_{i^*} = [0, nb - i^*(a+b)],$$

and the frequencies of the signal to be processed are in the range $[a, b]$, given $[a, b]$ and the required output frequency range f_y , the system further comprises the means for determining the smallest \bar{N} from the relationship above for the said generalised non-linear system which can bring about the specified frequency domain energy transformation.

12. A system as claimed in claim 11, wherein, with \bar{N} having been determined and $K_n, n=1, \dots, \bar{N}$, being given a priori, the system further comprises the means:

for taking N as \bar{N} and for determining the coefficients of the time domain model of the generalised non-linear system from the description for the system output spectrum given in terms of the spectrum of the input signal and the coefficients of the time domain model of the generalised non-linear system.

13. A system as claimed in claim 12, further comprising means for substituting $H_n(jw_1, \dots, jw_n)$ given in (C13) into (C12), and substituting the resultant expression for $Y_n(jw)$ into (C11) to obtain the description for the system output spectrum in terms of a function of the spectrum of the input signal and the coefficients of the time domain model of the generalised nonlinear system.

14. A computer program product for designing a non-linear system for transferring energy from an input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to an output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, the said product comprising a computer readable storage medium comprising:

computer program code means for identifying the first spectrum of an input signal from which energy is to be transferred,

computer program code means for specifying the second spectrum of an output signal to which said energy is to be transferred, and

computer program code means for calculating, using a frequency domain description of the output spectrum expressed in terms of a frequency domain description of the input and coefficients of a time domain description of a generalised non-linear system, the coefficients of a the time domain description of said generalised non-linear system in order to give effect to the energy transfer.

15. A computer program product as claimed in claim 14, wherein the frequency domain description of the input signal is $U(jw)$, the time domain description of the generalised non-linear system is given by the generalised NARX model

$$y(k) = \sum_{n=1}^N y_n(k) \quad (C17)$$

where

$$y_n(k) = \sum_{p=0}^n \sum_{l_1, \dots, l_{p+q}=1}^{K_n} c_{pq}(l_1, \dots, l_{p+q}) \prod_{i=1}^p y(k-l_i) \prod_{i=p+1}^{p+q} u(k-l_i) \quad (C18)$$

with

$$p+q=n, \quad l_i=1, \dots, K_n, \quad i=1, \dots, p+q, \quad \text{and} \quad \sum_{l_1, l_{p+q}=1}^{K_n} = \sum_{l_1=1}^{K_n} \dots \sum_{l_{p+q}=1}^{K_n}$$

the frequency domain description of the output of the the generalised non-linear system is given by

$$Y(j\omega) = \sum_{n=1}^{\bar{N}} Y_n(j\omega) \quad (C19)$$

where

$$Y_n(j\omega) = \frac{1/\sqrt{n}}{(2\pi)^{n-1}} \int_{\omega_1+\dots+\omega_n=\omega} H_n(j\omega_1, \dots, j\omega_n) \prod_{i=1}^n U(j\omega_i) d\sigma_w \quad (C20)$$

\bar{N} is the maximum order of dominant system nonlinearities,

$$\int (\cdot) d\sigma_w$$

denotes an integration over the nth-dimensional hyper-plane $\omega_1+\dots+\omega_n=\omega$, and $H_n(j\omega_1, \dots, j\omega_n)$, $n=1, \dots, \bar{N}$ are generalised frequency response functions of the non-linear system.

16. A computer program product as claimed in claim 15, wherein the mapping from the time domain description of the generalised non-linear system to the frequency domain description of the system is given as

$$\begin{aligned} & \left\{ 1 - \sum_{l_1=1}^{K_1} c_{10}(l_1) \exp[-j(\omega_1+\dots+\omega_n)l_1] \right\} H_n(j\omega_1, \dots, j\omega_n) \\ &= \sum_{l_1, l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \exp[-j(\omega_1 l_1 + \dots + \omega_n l_n)] \\ &+ \sum_{q=1}^{n-1} \sum_{p=1}^{n-q} \sum_{l_1, l_{p+q}=1}^{K_{p+q}} c_{pq}(l_1, \dots, l_{p+q}) \exp[-j(\omega_{n-q+1} l_{p+1} + \dots + \omega_n l_{p+q})] H_{n-q,p}(j\omega_1, \dots, j\omega_{n-q}) \\ &+ \sum_{p=2}^n \sum_{l_1, l_p=1}^{K_p} c_{p0}(l_1, \dots, l_p) H_{n,p}(j\omega_1, \dots, j\omega_n) \end{aligned} \quad (C21)$$

where

$$H_{np}(j\omega_1, \dots, j\omega_n) = \sum_{i=1}^{n-p+1} H_i(j\omega_1, \dots, j\omega_i) H_{n-i,p-1}(j\omega_{i+1}, \dots, j\omega_n) \exp[-j(\omega_1 + \dots + \omega_i)l_p] \quad (C22)$$

17. A computer program product as claimed in claim 16, wherein the relationship between the input and output frequencies or frequency ranges is given by the following

$$f_y = f_{y_{\bar{N}}} \cup f_{y_{\bar{N}-1}} \quad (C23)$$

where f_y denotes the range of frequencies of the output, and $f_{y_{\bar{N}}}$ and $f_{y_{\bar{N}-1}}$ denotes the ranges of frequencies produced by the \bar{N} th-order and $(\bar{N}-1)$ th-order nonlinearities, and

$$f_{y_n} = \begin{cases} \bigcup_{k=0}^{i^*-1} I_k & \text{when } \frac{nb}{(a+b)} - \left\lceil \frac{na}{(a+b)} \right\rceil < 1 \\ \bigcup_{k=0}^{i^*} I_k & \text{when } \frac{nb}{(a+b)} - \left\lceil \frac{na}{(a+b)} \right\rceil \geq 1 \end{cases} \quad (C24)$$

where $[.]$ relates to or means take the integer part, $n = \bar{N}$ and $\bar{N}-1$

$$i^* = \left\lceil \frac{na}{(a+b)} \right\rceil + 1$$

$$I_k = [na - k(a+b), nb - k(a+b)] \quad \text{for } k = 0, \dots, i^* - 1,$$

$$I_{i^*} = [0, nb - i^*(a+b)],$$

and the frequencies of the signal to be processed are in the range $[a, b]$, given $[a, b]$ and the required output frequency range f_y , the computer program product further comprises computer program code means for determining the smallest \bar{N} from the relationship above for the said generalised non-linear system which can bring about the specified frequency domain energy transformation.

18. A computer program product as claimed in claim 17, wherein, with \bar{N} having been determined and $K_n, n=1, \dots, \bar{N}$, being given a priori, said product further comprises computer program code means of:

taking N as \bar{N} and determining the coefficients of the time domain model of the generalised non-linear system from the description for the system output spectrum given in terms of the spectrum of the input signal and the coefficients of the time domain model of the said generalised non-linear system.

19. A computer program product as claimed in claim 18, further comprising computer program code means for substituting $H_n(jw_1, \dots, jw_n)$ given in (C21) into (C20), and substituting the resultant expression for $Y_n(jw)$ into (C19) to obtain the description for the system output spectrum in terms a function of the spectrum of the input signal and the coefficients of the time domain model of the generalised nonlinear system.

20. A method for designing a non-linear system for transferring energy from an input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to an output signal having a second spectrum at a second pre-determinable frequency or range of frequencies substantially as described herein with reference to and/or as illustrated in the accompanying drawings.

21. A method for manufacturing comprising the steps of designing a non-linear system for transferring energy from an input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to an output signal having a second spectrum at a second pre-determinable frequency or range of frequencies using a method substantially as described herein with reference to and/or as illustrated in the accompanying drawings and materially producing the non-linear system so designed.

22. A data processing system for designing a non-linear system for transferring energy from an input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to an output signal having a second spectrum at a second pre-determinable frequency or range of frequencies substantially as described herein with reference to and/or as illustrated in the accompanying drawings.

23. A computer program product comprising computer program code means for designing and/or implementing a non-linear system for transferring energy from an input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to an output signal having a second spectrum at a second pre-determinable frequency or range of frequencies substantially as described herein with reference to and/or as illustrated in the accompanying drawings.

24. A non-linear system for transferring energy from an input signal having a first spectrum at a first predeterminable frequency or range of frequencies to an output signal having a second spectrum at a pre-determinable frequency or range of frequencies substantially as described herein with reference to and/or as illustrated in the accompanying drawings.

25. A non-linear system which can transfer energy from an input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to an output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said system comprising

means for identifying the first spectrum of the input signal from which energy is to be transferred,

means for specifying the second spectrum of the output signal to which said energy is to be transferred, and

means for giving effect to the energy transfer using coefficients of a time domain description of a generalised non-linear system, said coefficients having been calculated using a frequency domain description of said output spectrum expressed in terms of a frequency domain description of said input signal and coefficients

of a time domain description of a generalised non-linear system.

26. A non-linear system for transferring energy from an input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to an output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said system comprising means for implementing a method as claimed in any of claims 1 to 7.

27. A non-linear system for transferring energy from an input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to an output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, said non-linear system comprising a data processing system as claimed in any of claims 8 to 13.

28. An article of manufacture comprising a computer usable medium with computer readable program code means embodied in the medium for designing a non-linear system for transferring energy from an input signal having a first spectrum at a first pre-determinable frequency or range of frequencies to an output signal having a second spectrum at a second pre-determinable frequency or range of frequencies, the computer readable program code means in said article comprising:

computer readable program code means for identifying the first spectrum of an input signal from which energy is to be transferred,

computer readable program code means for specifying the second spectrum of an output signal to which said energy is to be transferred, and

computer readable program code means for calculating, using a frequency domain description of the output spectrum expressed in terms of a frequency domain description of the input and coefficients of a time domain description of a generalised non-linear system, the coefficients of a the time domain description of said generalised non-linear system in order to give effect to the energy transfer.

ABSTRACT**Nonlinear System, Method of Design thereof in the Frequency Domain and Computer Program Product**

The present invention relates to nonlinear systems and methods of design thereof in the frequency domain. Typically, conventional linear filter design involves attenuating signals at frequencies which are not of interest and dissipating the energy at those frequencies as, for example, heat or sound. However, in most systems, it is not always convenient to design a linear system or design a system solely with energy attenuation in mind. Therefore, the present invention provides a non-linear system and method of design thereof in the frequency domain which can be used to transfer energy at a first pre-determinable frequency, or frequency range, to a second pre-determinable frequency, or frequency range. Using the method of the present invention a non-linear system can be developed which can meet given energy transfer requirements or a non-linear system can be designed which can alter the transfer function of an existing non-linear or linear system.

THIS PAGE BLANK (USPTO)

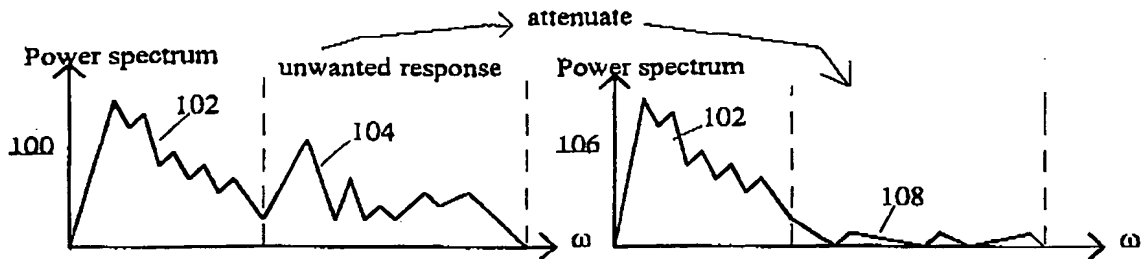


Figure 1 Traditional linear filter designs based on attenuating unwanted effects.

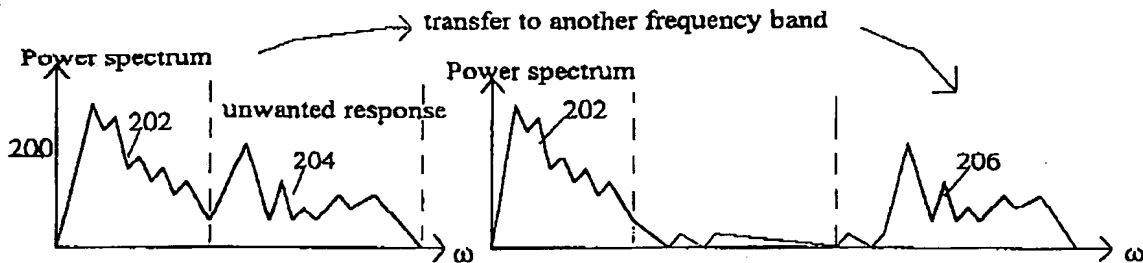


Figure 2 The new design which exploits nonlinear properties to transfer the unwanted effects to another frequency band

THIS PAGE BLANK (USPTO)

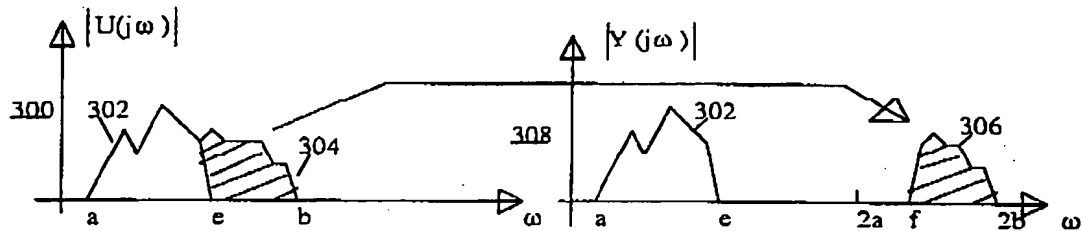


Figure 3. A design specification to transfer the unwanted frequency components to a different frequency band

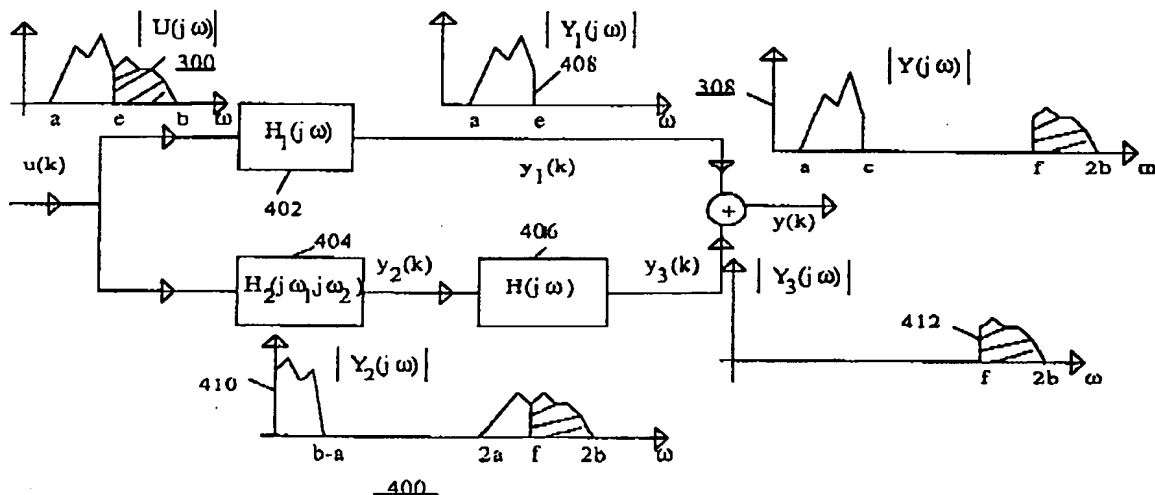


Figure 4 The structure of a non-linear system designed to implement the specification shown in figure 3.

THIS PAGE BLANK (USPTO)

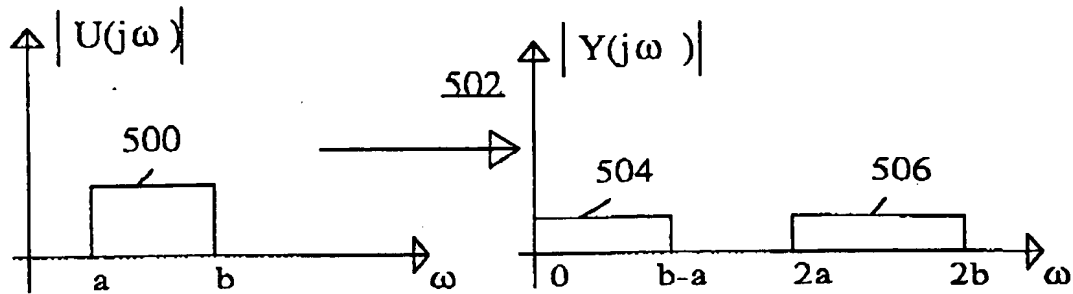


Figure 5 Illustration of energy distribution over a wider frequency band using the present invention

THIS PAGE BLANK (USPTO)

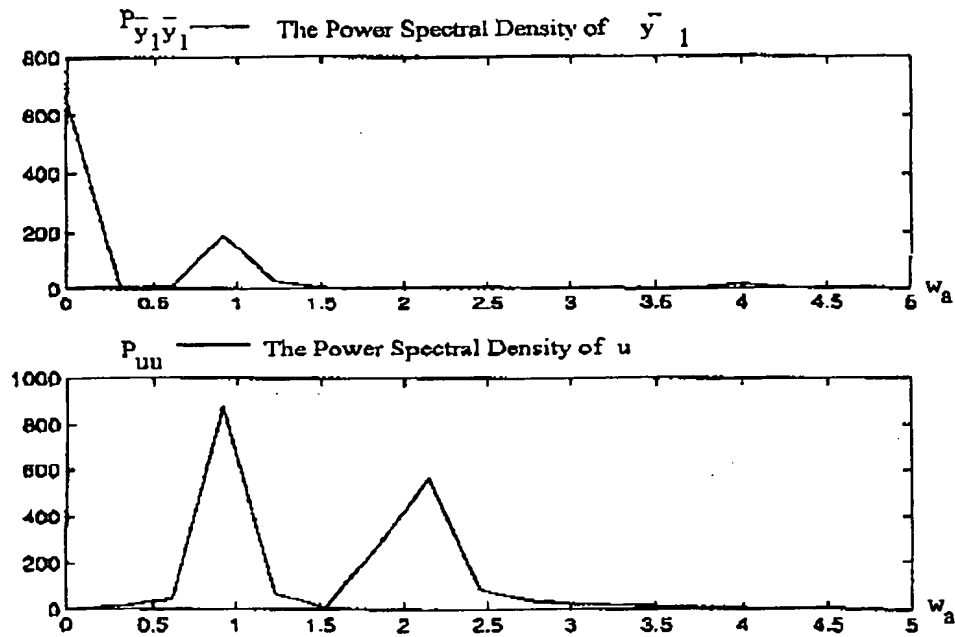


Figure 6 The power spectral densities of the output and input of the nonlinear filter which is initially designed to address the first filtering problem in Design 1.

THIS PAGE BLANK (USPTO)

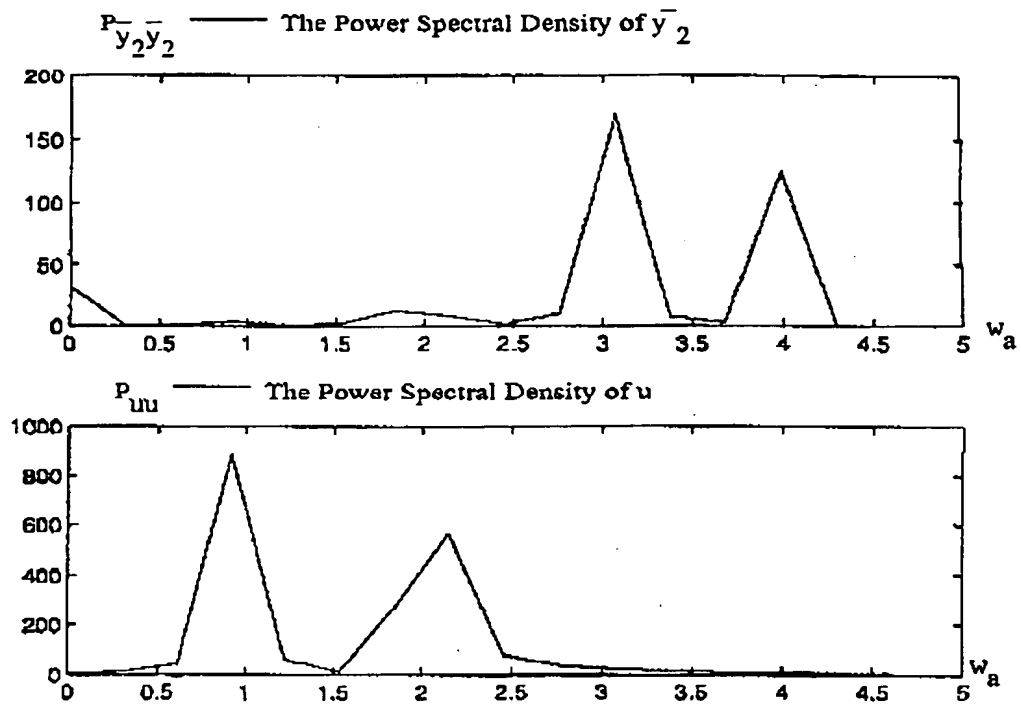


Figure 7 The power spectral densities of the output and input of the nonlinear filter which is initially designed to address the second filtering problem in Design 1.

THIS PAGE BLANK (USPTO)

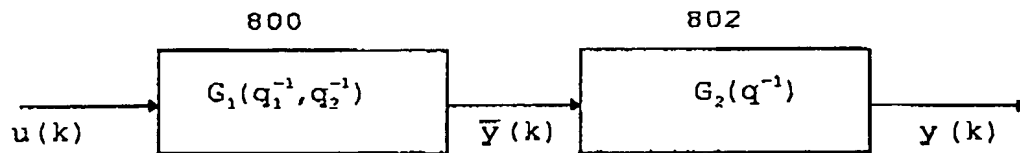


Figure 8 The structure of the nonlinear filters designed in Design 1.

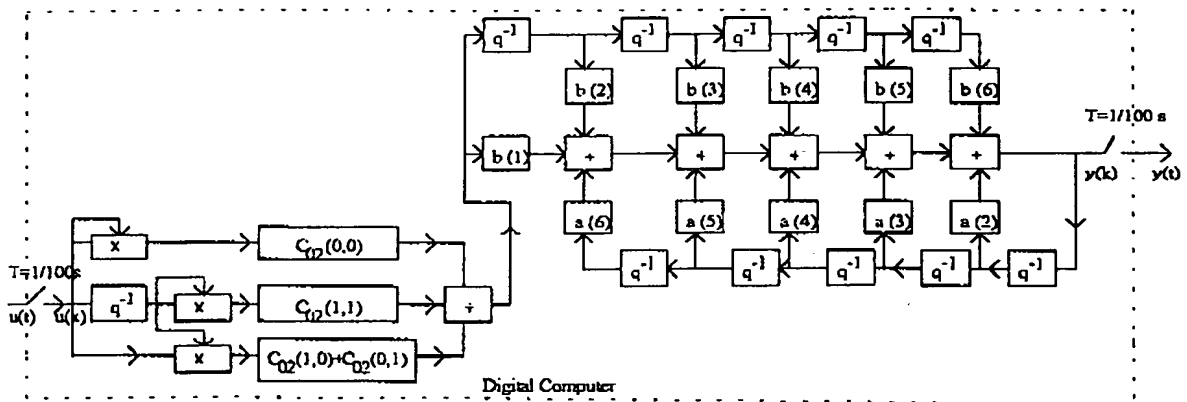


Figure 9. The block diagram of the nonlinear filters designed in Design 1.

THIS PAGE BLANK (USPTO)

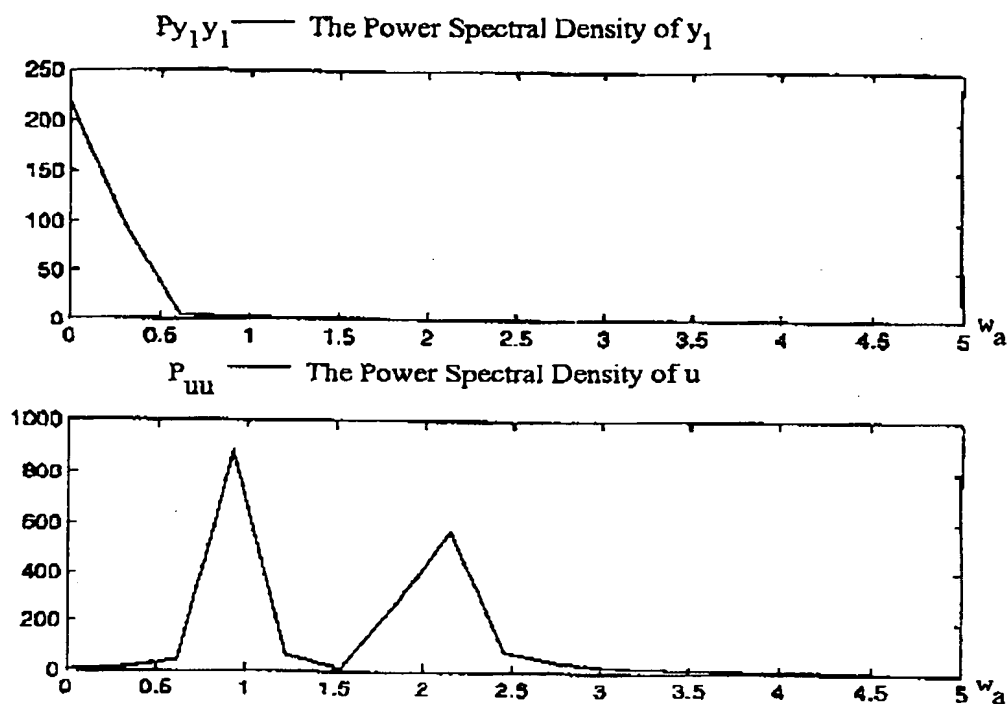


Figure 10 The power spectral densities of the output and input of the nonlinear filter eventually obtained for the first filtering problem in Design 1.

THIS PAGE BLANK (USPTO)

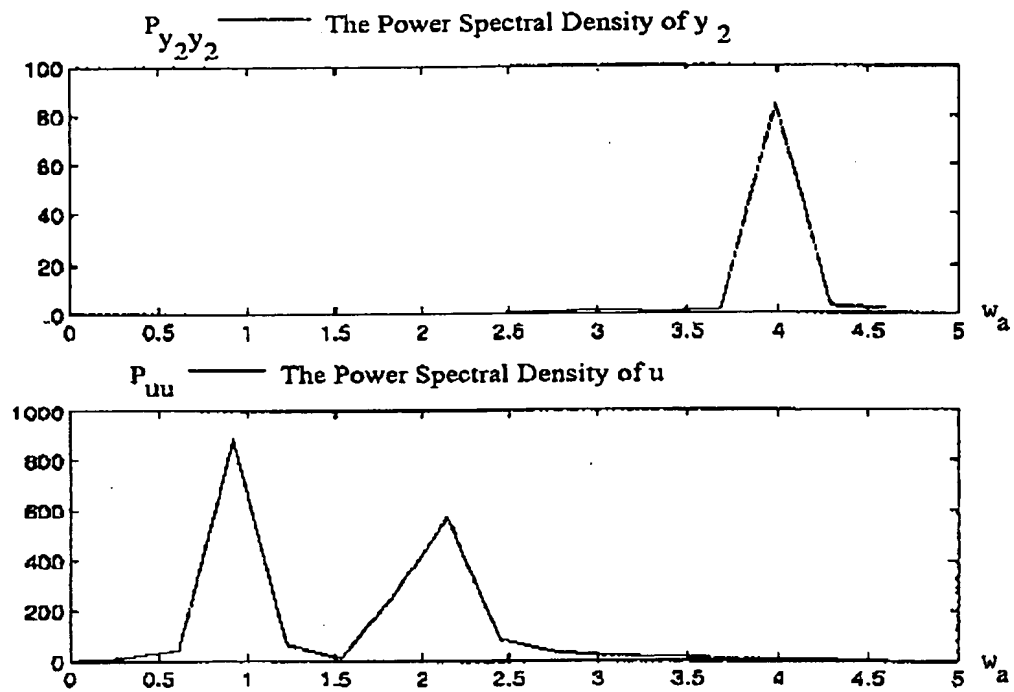


Figure 11 The power spectral densities of the output and input of the nonlinear filter eventually obtained for the second filtering problem in Design 1.

THIS PAGE BLANK (USPTO)

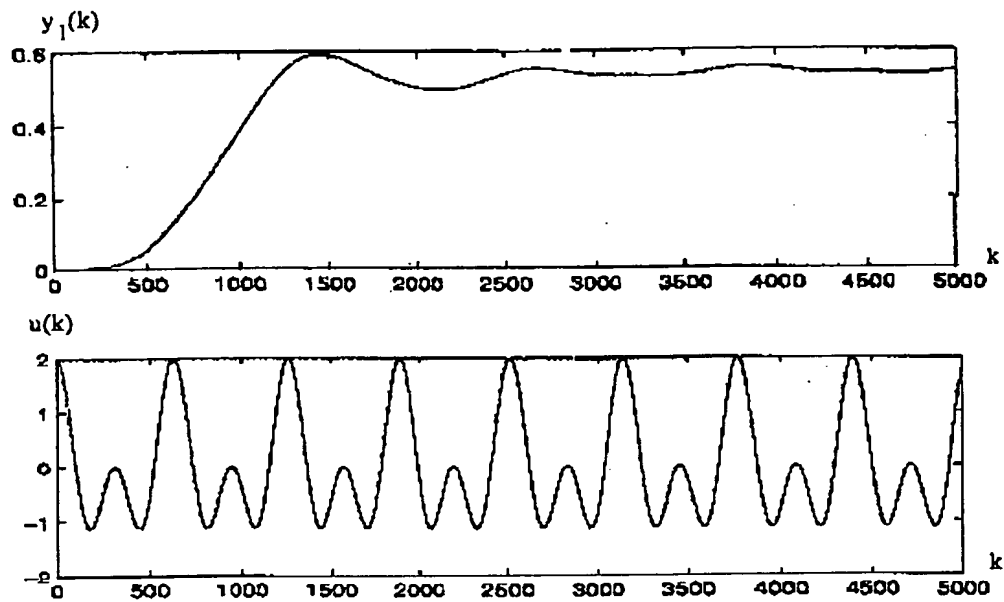


Figure 12 Input and output of the nonlinear filter designed for the first filtering problem in Design 1.

THIS PAGE BLANK (USPTO)

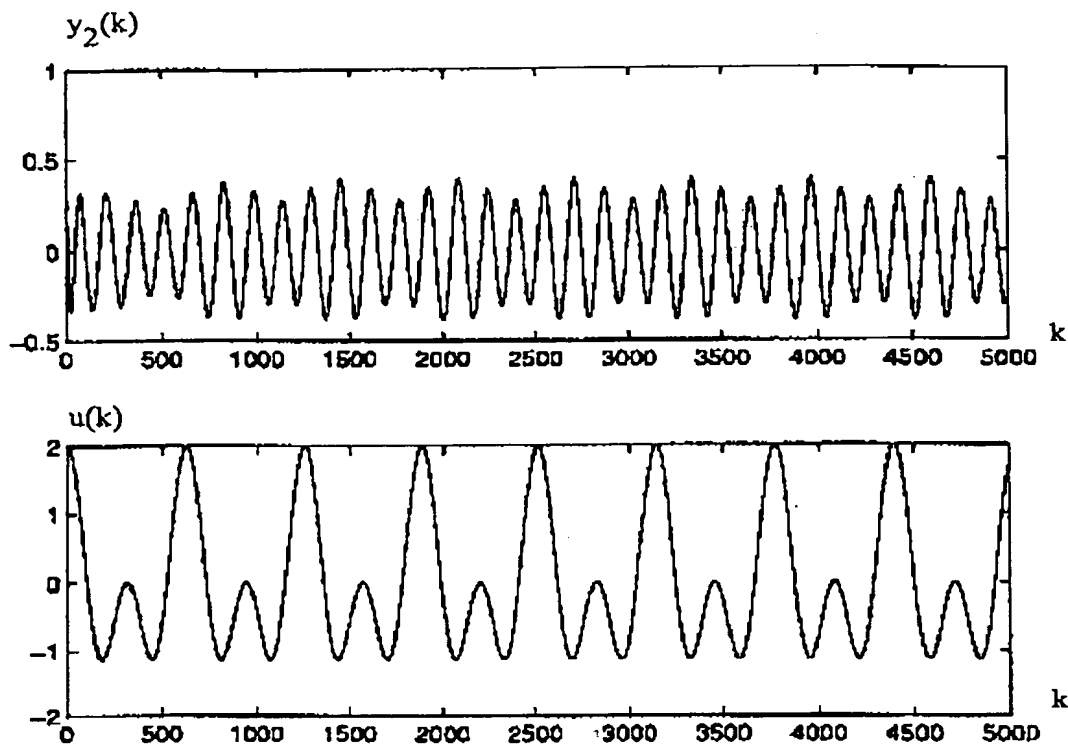


Figure 13 Input and output of the nonlinear filter designed for the second filtering problem in Design 1.

THIS PAGE BLANK (USPTO)

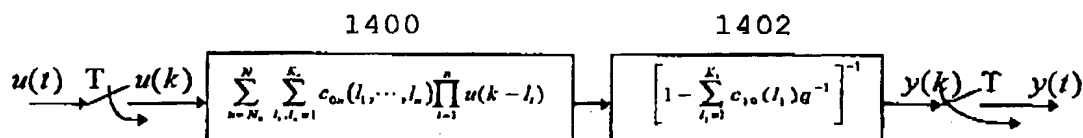


Figure 14 The structure of nonlinear systems designed in Design 2.

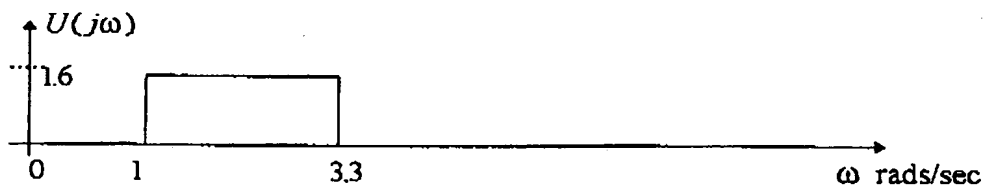


Figure 15 The frequency spectrum of the first signal to process in example 1, Design 2.

THIS PAGE BLANK (USPTO)

THIS PAGE BLANK (USPTO)

THIS PAGE BLANK (USPTO)

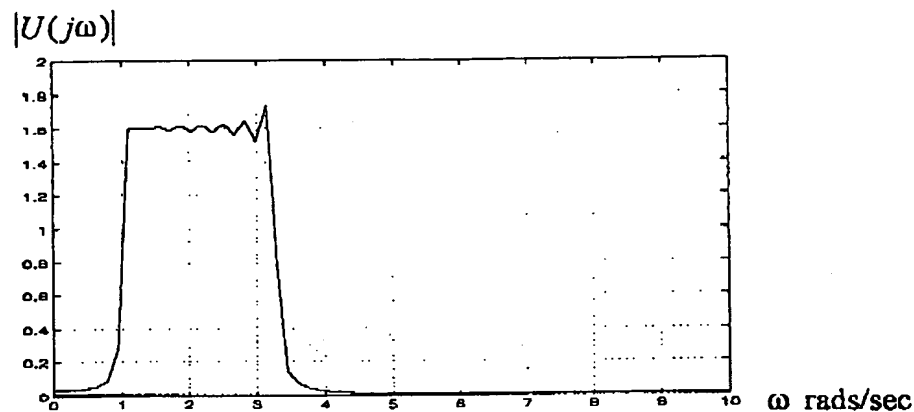


Figure 16 The computed result for the spectrum given in figure 15.

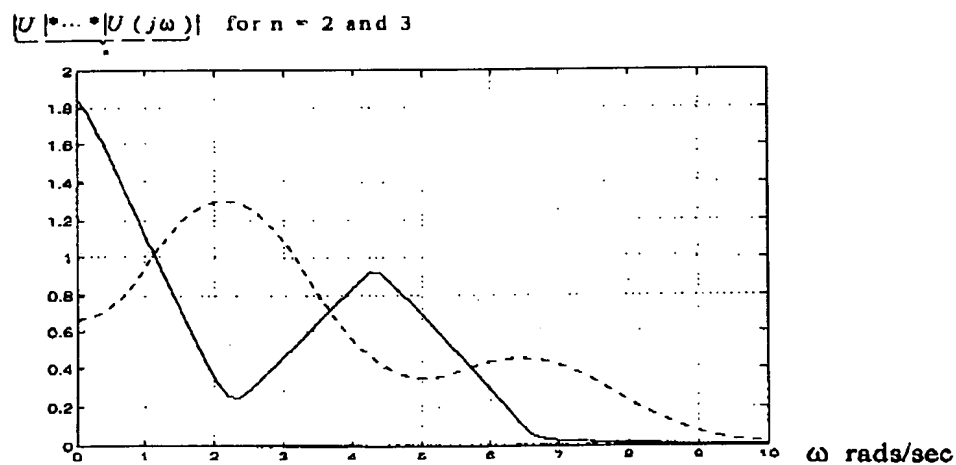


Figure 17 Results of n-dimensional convolution integration for $|U(j\omega)|$ in example 1, Design 2; n=2-solid, n=3-dashed.

THIS PAGE BLANK (USPTO)


$|Y(j\omega)|$ 

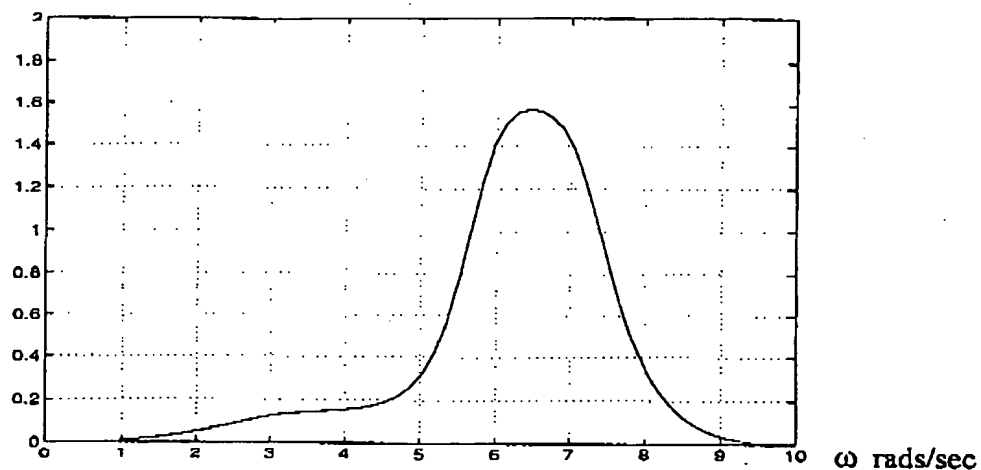Figure 18 Output frequency response of the nonlinear system designed in example 1, Design 2, to the first signal with the frequency spectrum shown in figure 15.

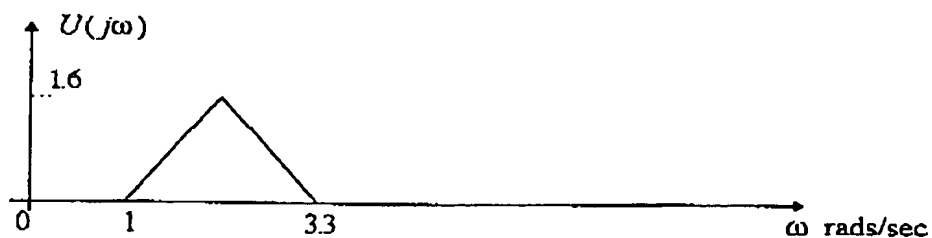


Figure 19. The frequency spectrum of the second signal to process in example 1, Design 2.

THIS PAGE BLANK (USPTO)

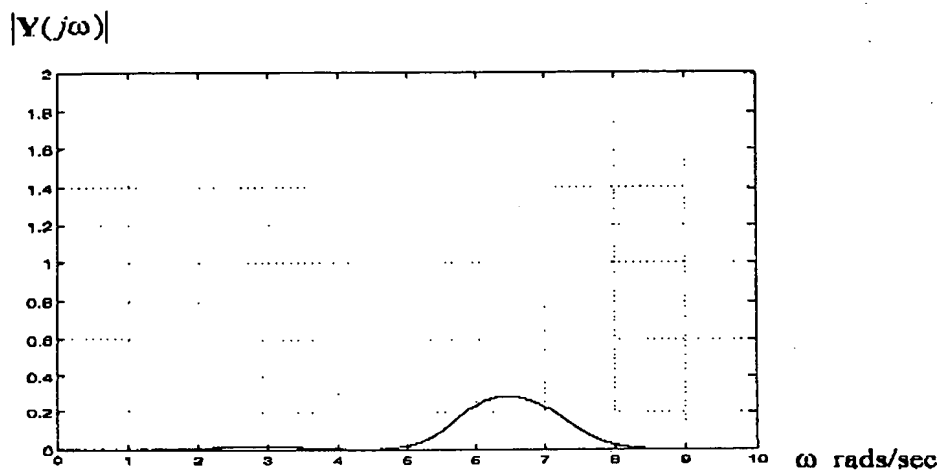


Figure 20 Output frequency response of the nonlinear system designed in example 1, design 2 to the second signal with the frequency spectrum shown in figure 19.

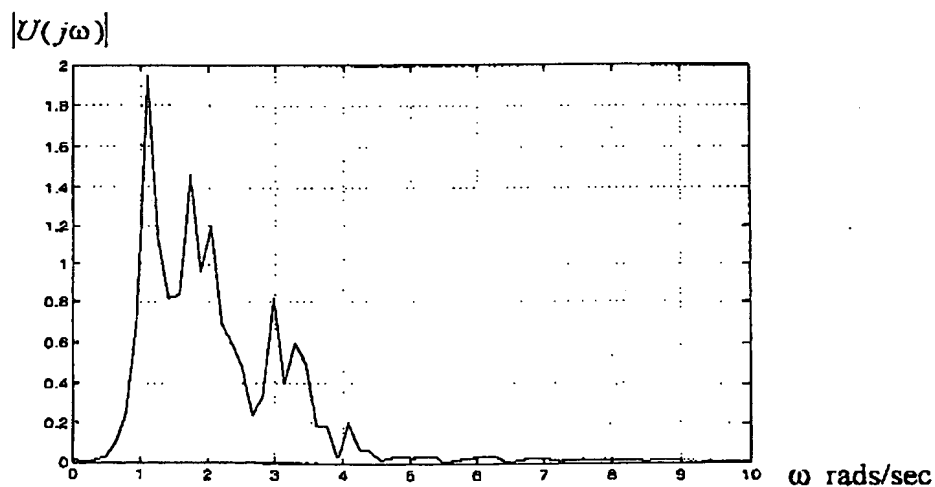


Figure 21 The frequency spectrum of the third signal to process in example 1, Design 2.

THIS PAGE BLANK (USPTO)

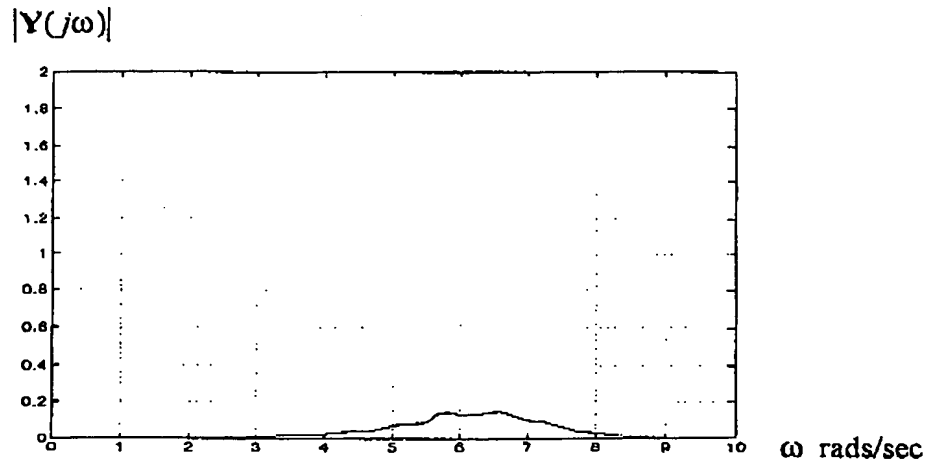


Figure 22 Output frequency response of the nonlinear system designed in example 1, Design 2, to the third signal with the frequency spectrum shown in figure 21.

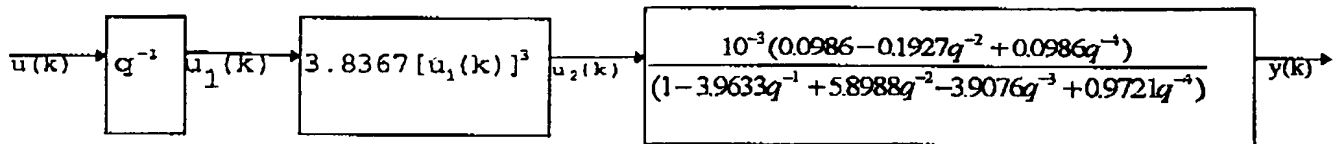


Figure 23 The structure of the nonlinear filter designed in Design 2, Example 1

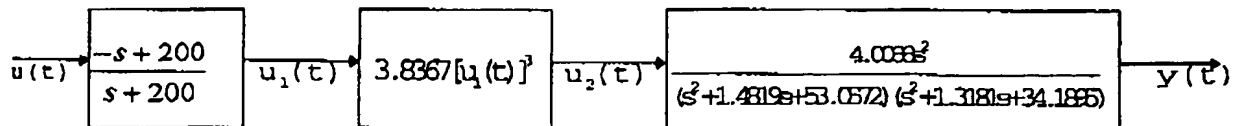


Figure 24 The continuous time realization of Design 2, Example 1

THIS PAGE BLANK (USPTO)

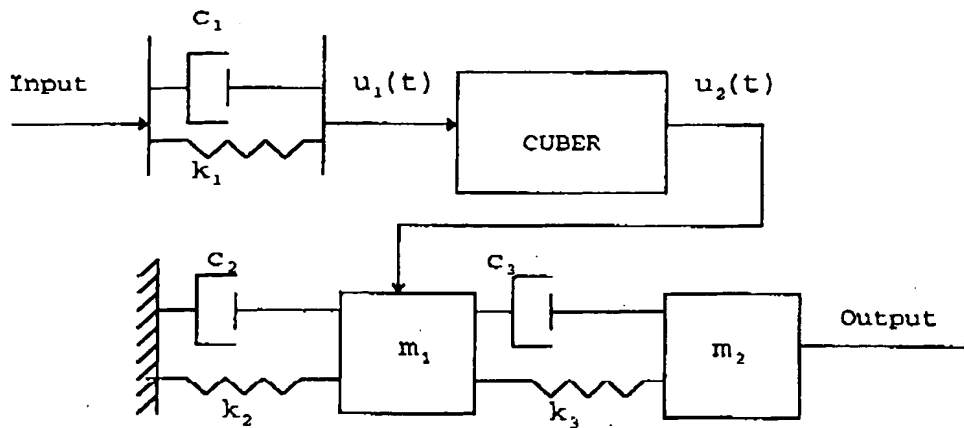


Figure 25 Mechanical realization of Design 2, Example 1

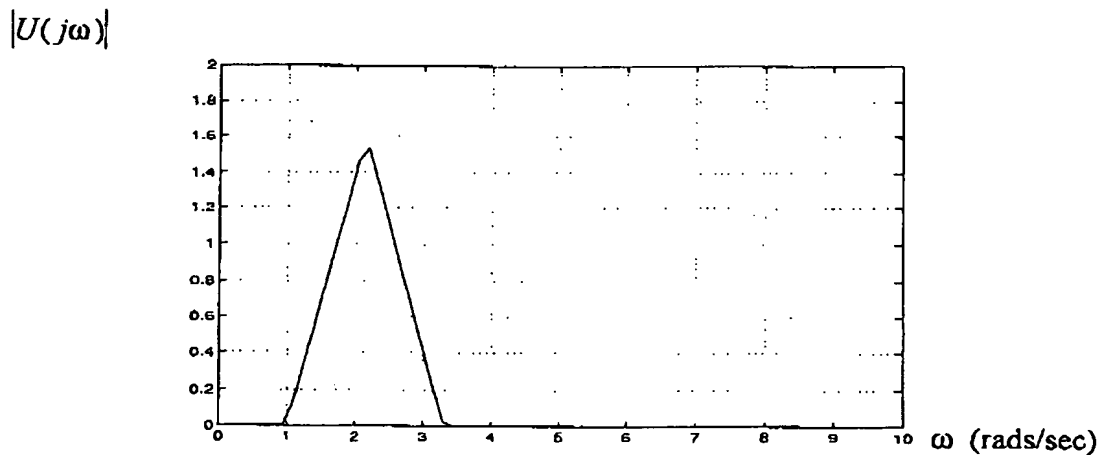


Figure 26 The computed result for the frequency spectrum of the signal to be processed in example 2, Design 2.

THIS PAGE BLANK (USPTO)

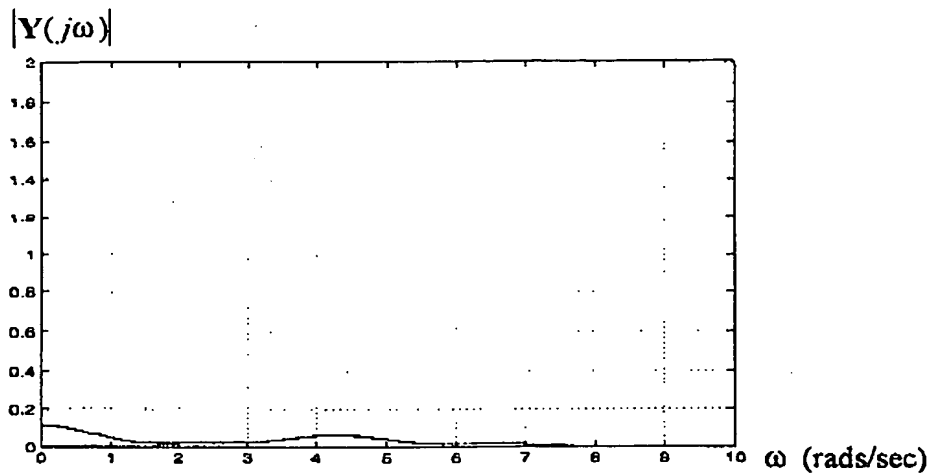


Figure 27 Output frequency response of the nonlinear system designed in example 2, Design 2.

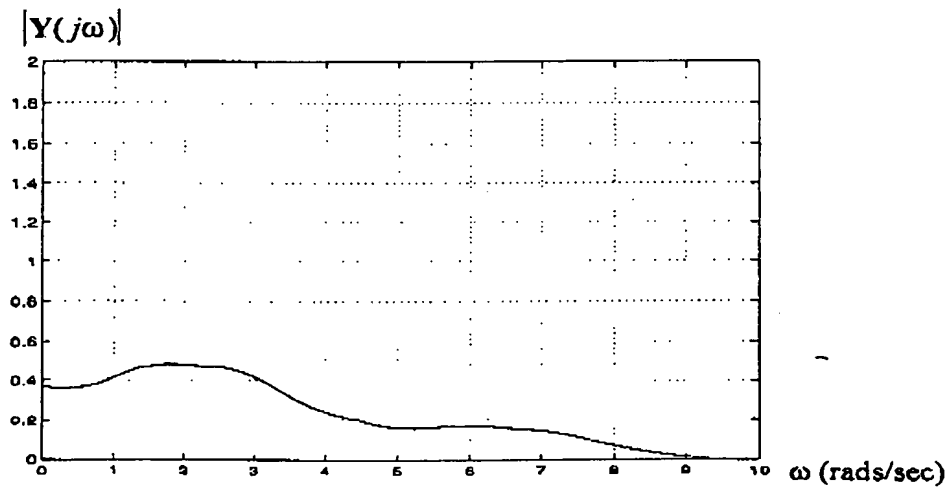


Figure 28 Output frequency response of the nonlinear system in example 3, Design 2, to the first input signal with the same frequency spectrum as shown in figure 15.

THIS PAGE BLANK (USPTO)


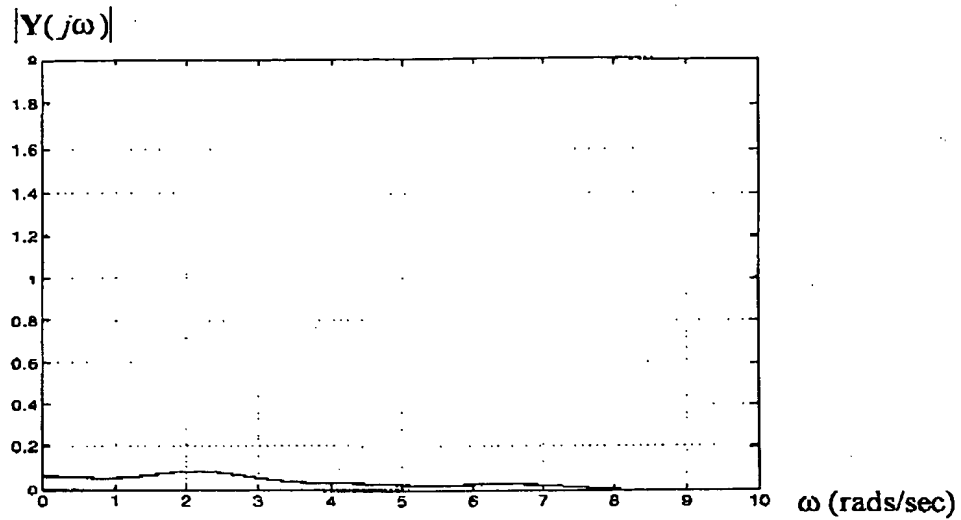



Figure 29 Output frequency response of the nonlinear system in example 3, Design 2, to the second input signal with the same frequency spectrum as shown in figure 19.

THIS PAGE BLANK (USPTO)

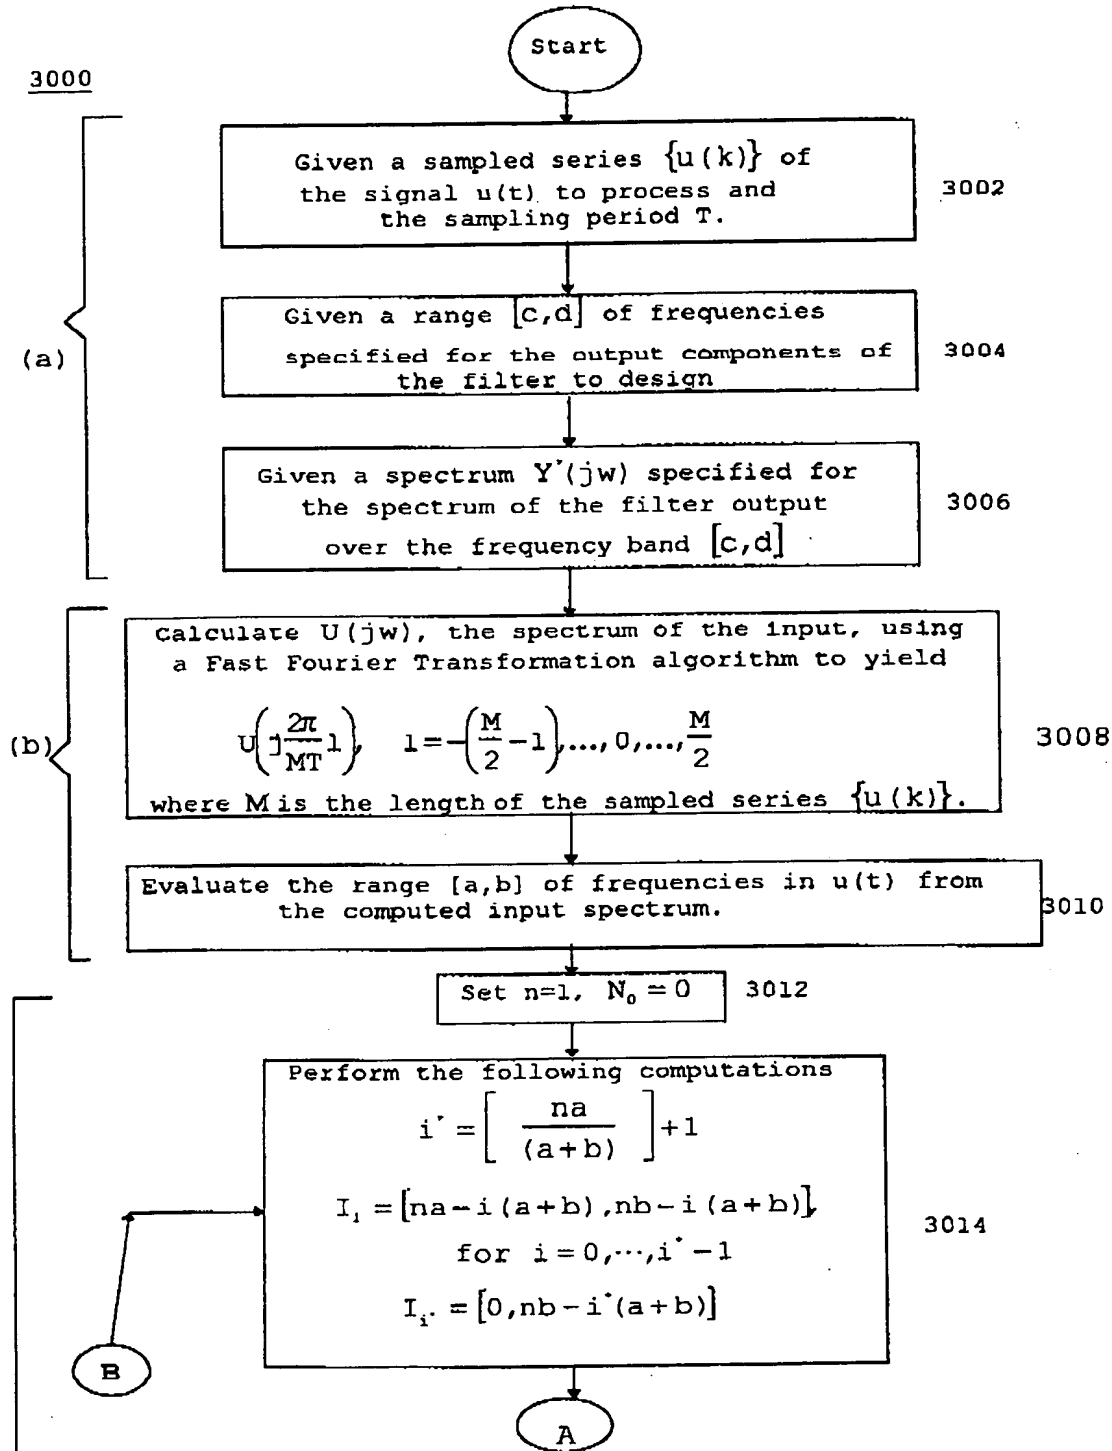
Figure 30 Flow Chart of the computer code which implements the present invention using a technique which directly formulates the output spectra of nonlinear systems to design.



THIS PAGE BLANK (USPTO)

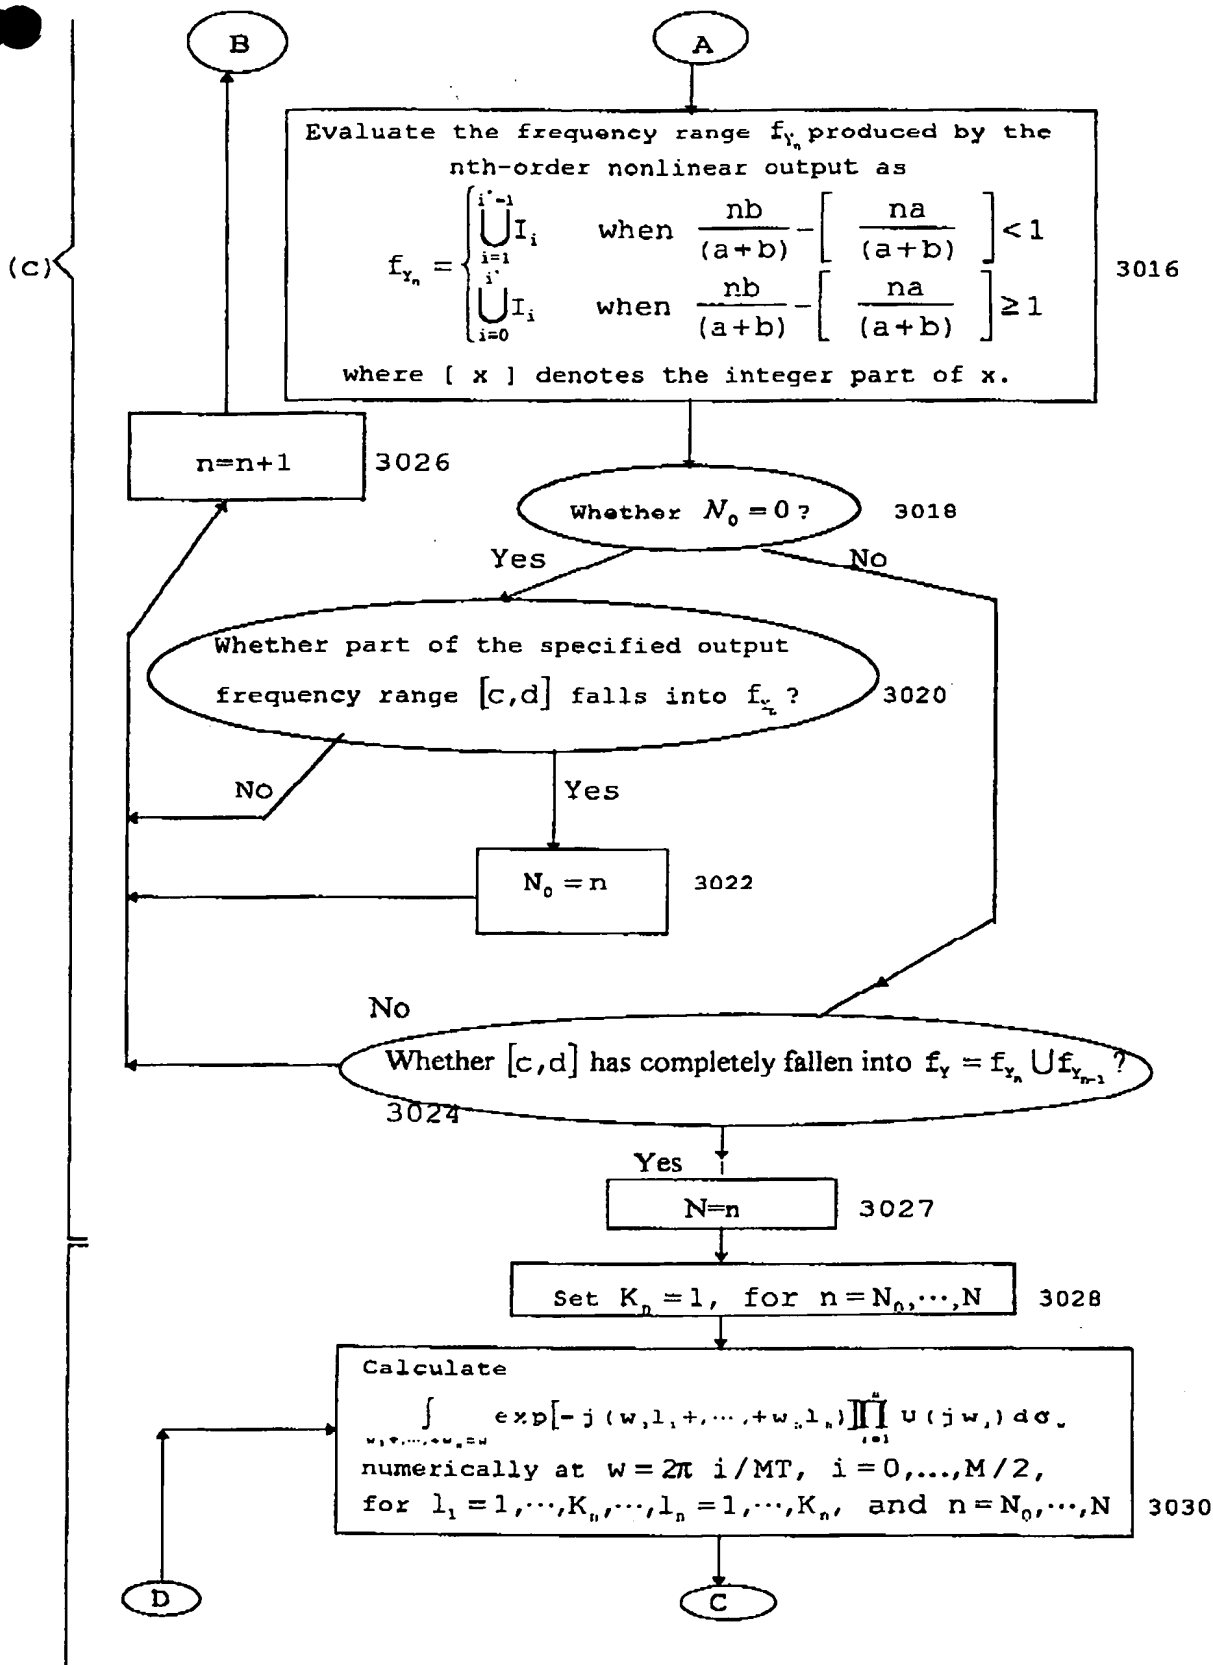


THIS PAGE BLANK (USPTO)

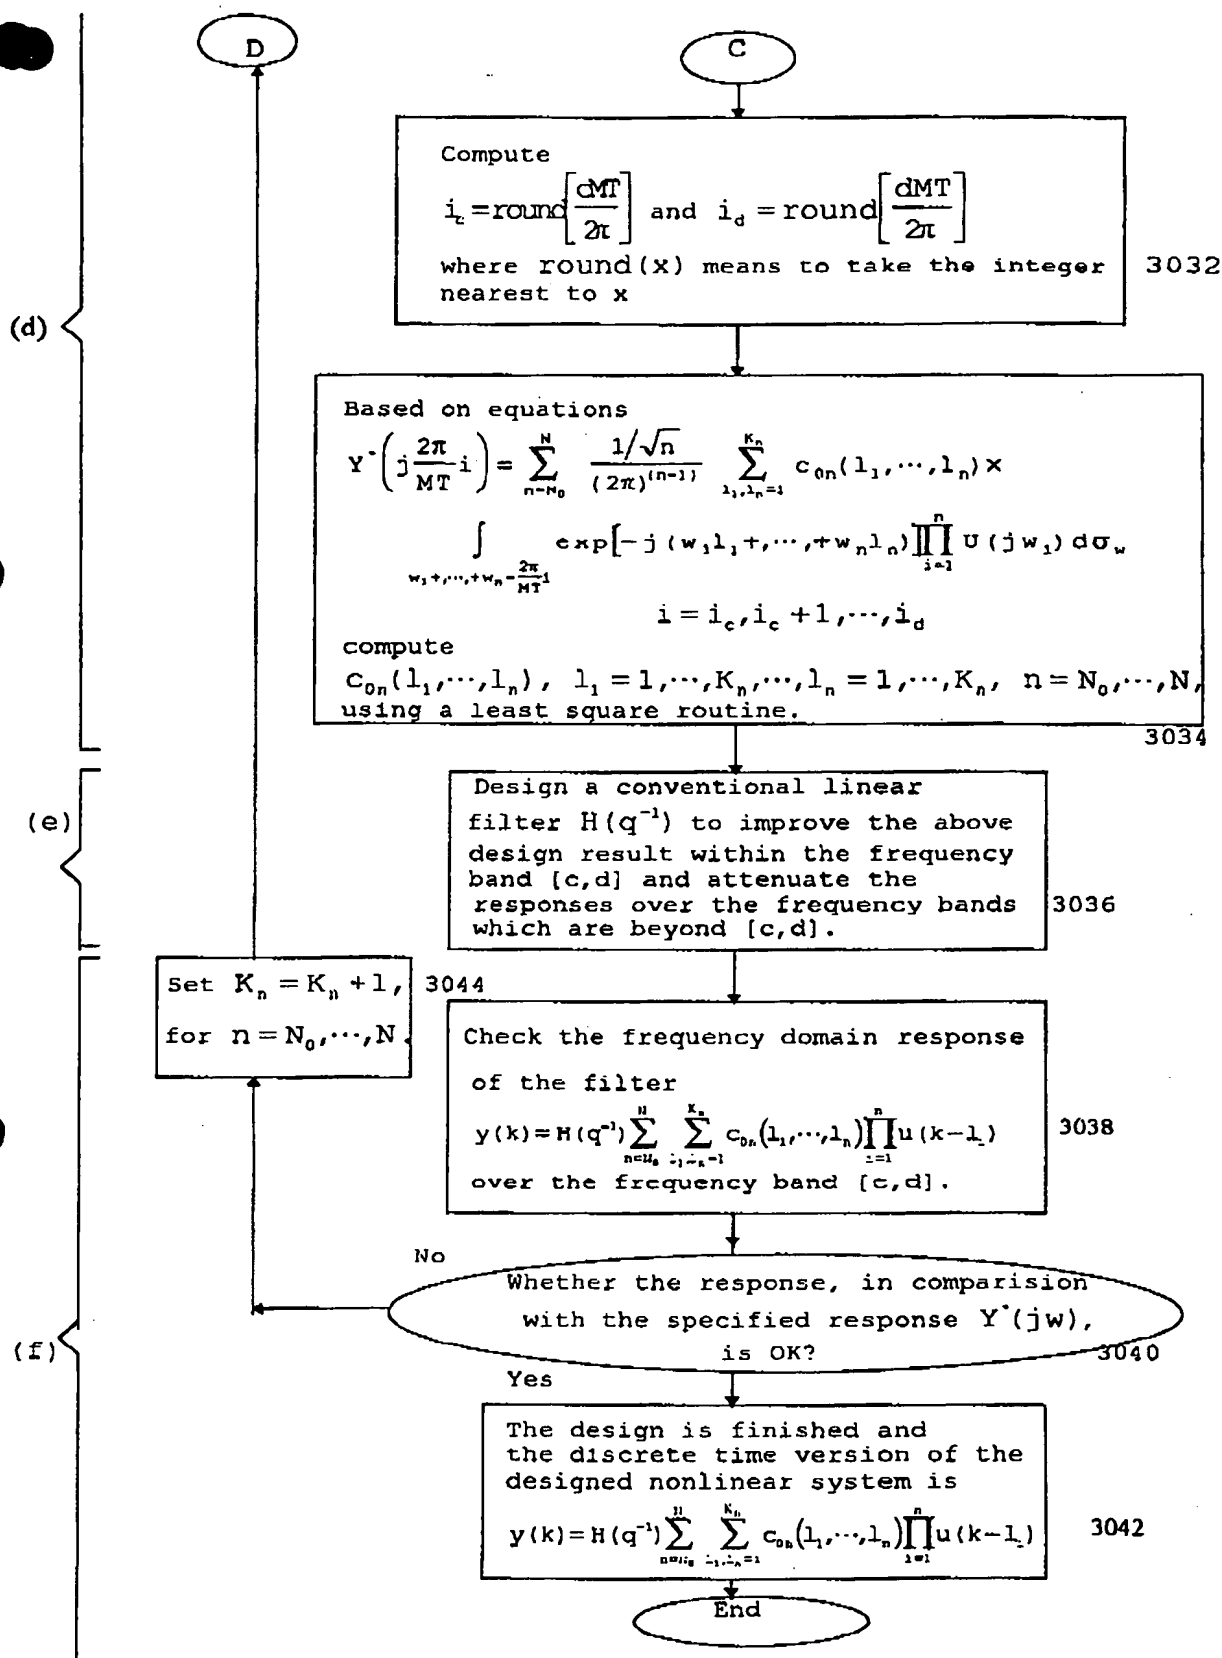

THIS PAGE BLANK (USPTO)

Figure 31 Flow Chart of the computer code which implements the present invention using a technique associated with the bound for output spectra of nonlinear systems.

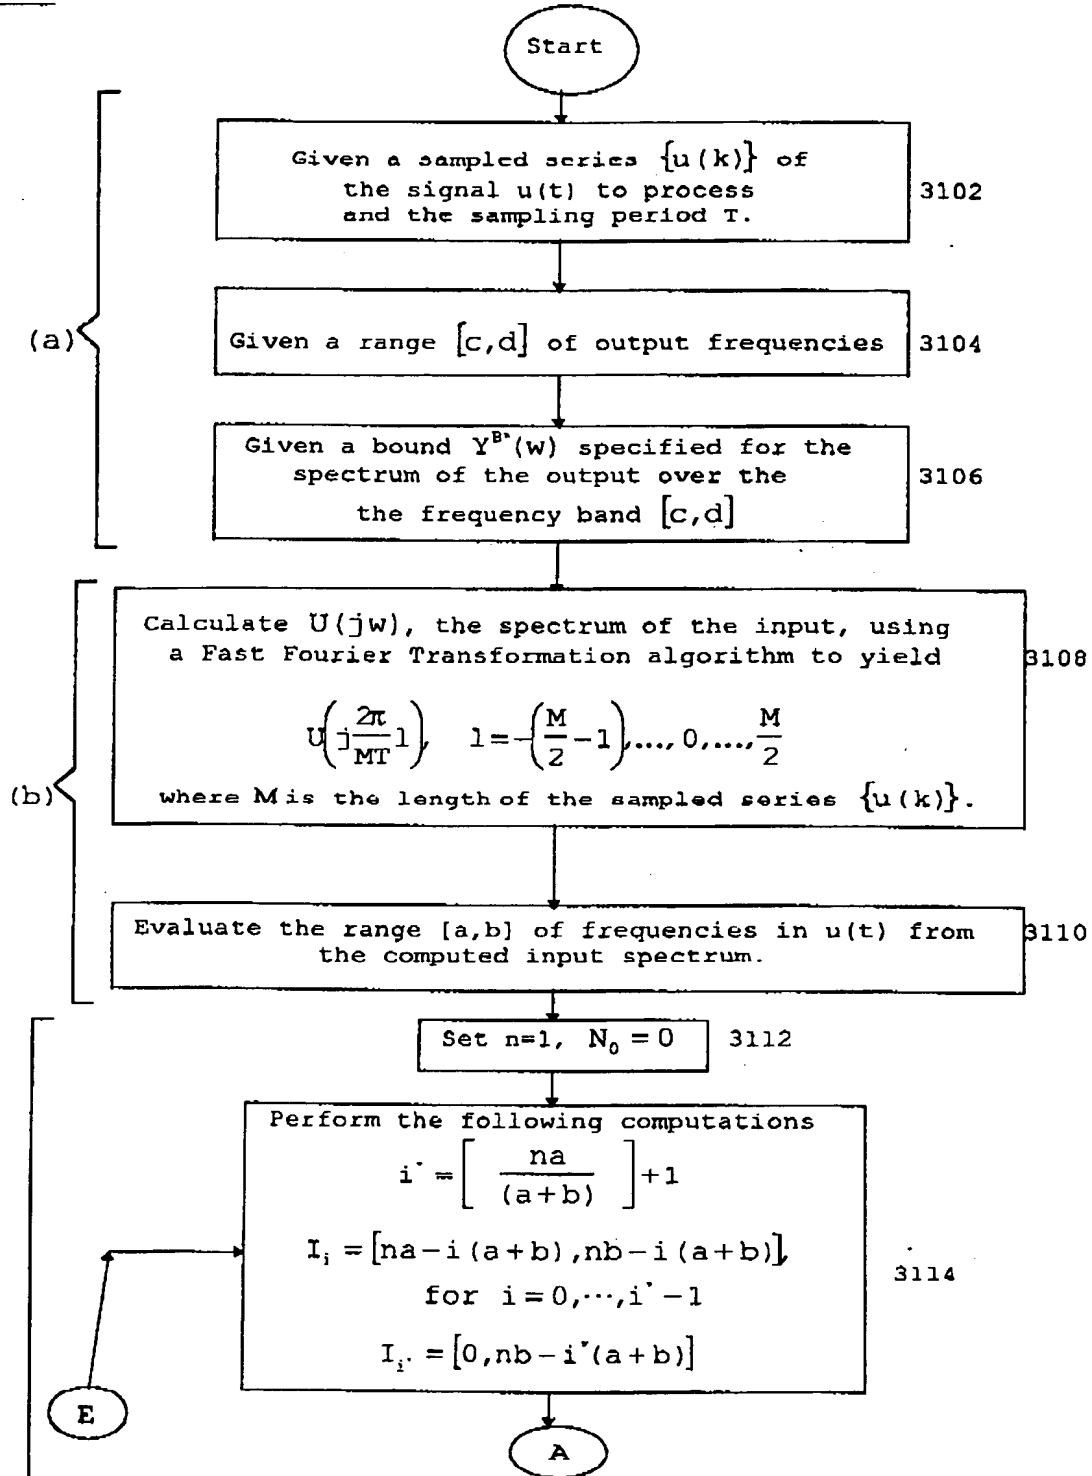
3100



THIS PAGE BLANK

THIS PAGE BLANK (USPTO)

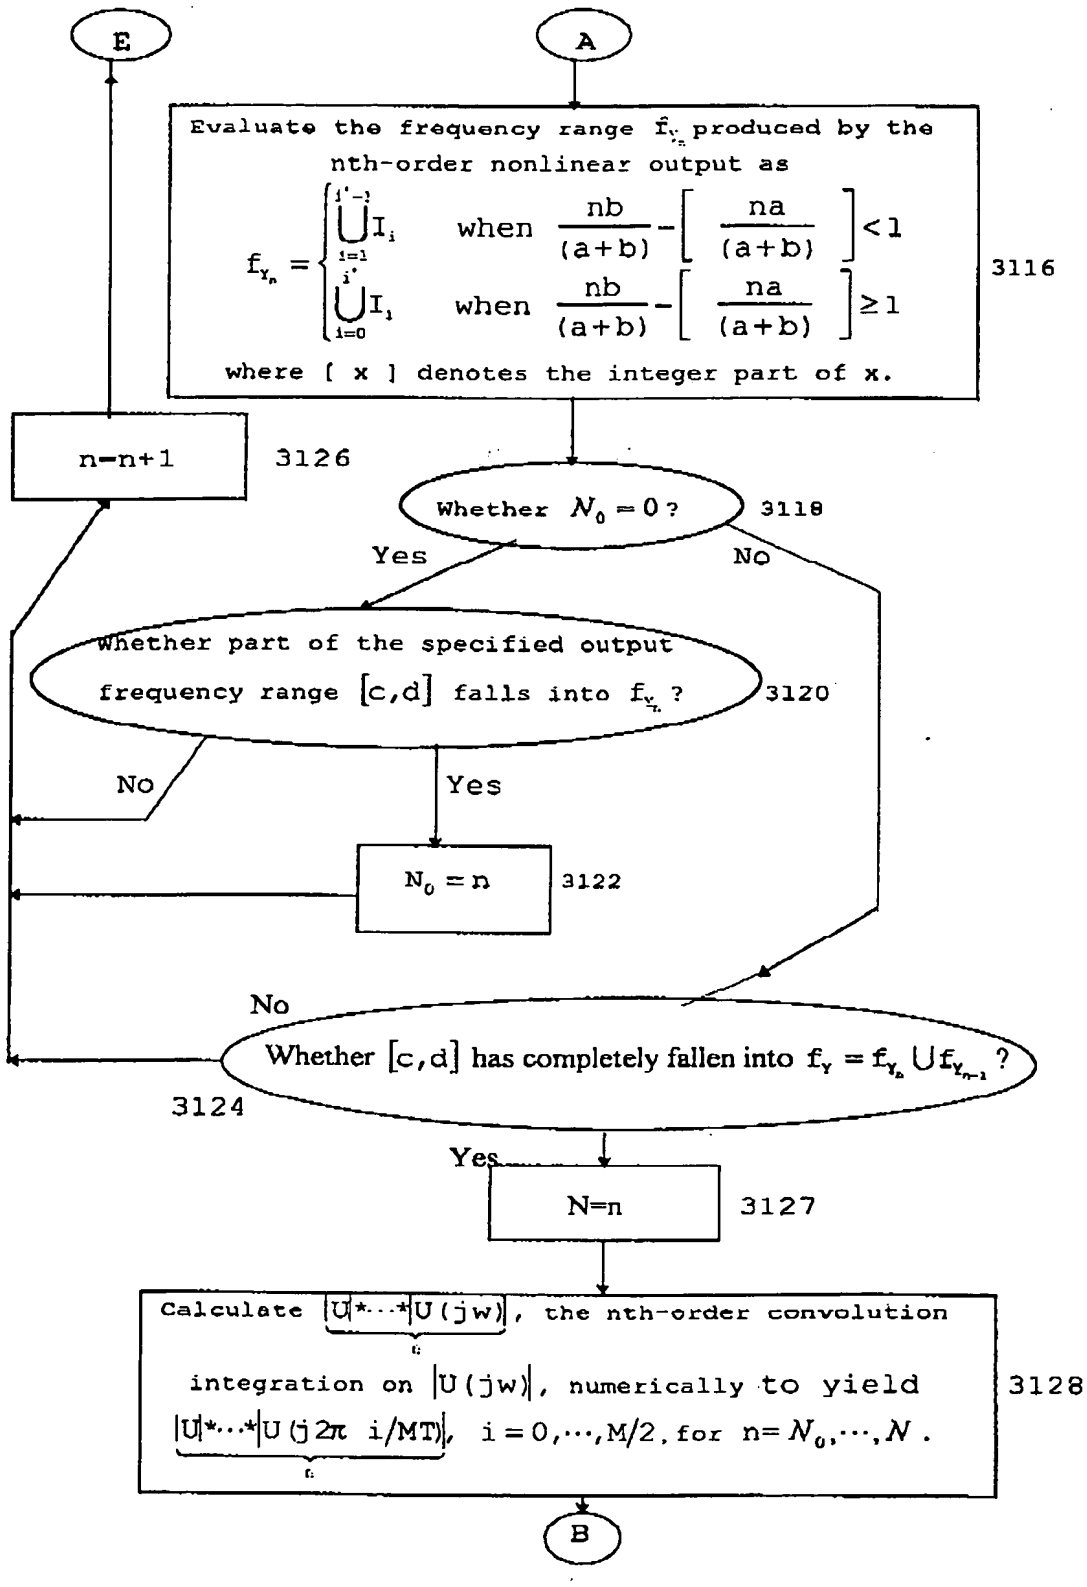(C)



THIS PAGE BLANK (USPTO)

(d)

B

Compute

$$i_c = \text{round} \left[\frac{dMT}{2\pi} \right] \text{ and } i_e = \text{round} \left[\frac{dMT}{2\pi} \right]$$

where $\text{round}(x)$ means to take the integer nearest to x

3132

Based on equations

$$y^* \left(\frac{2\pi}{MT} i \right) = \sum_{n=N_0}^N \frac{1}{(2\pi)^{1/2}} c_n \left| u^* \dots + \left| u \left[j \left(\frac{2\pi}{MT} i \right) \right] \right| \right|$$

3134

$$i = i_c, i_c + 1, \dots, i_e$$

compute

$$C_n, n = N_0, \dots, N,$$

using a least squares routine under the constraint that the results must be positive.

(e)

Select NARX model parameters

$K_n, C_{0n}(l_1, \dots, l_n), l_1 = 1, \dots, K_n, \dots, l_n = 1, \dots, K_n,$
for $n = N_0, \dots, N$, under the constraints

$$C_n = \sum_{l_1=1}^{K_n} \dots \sum_{l_n=1}^{K_n} |c_{0n}(l_1, \dots, l_n)|, \quad n = N_0, \dots, N$$

3136

and other constraints specified by specific design problems.

Check the frequency domain response of the filter

$$y(k) = \sum_{n=N_0}^N \sum_{l_1=1}^{K_n} \dots \sum_{l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i)$$

over the frequency bands beyond $[c, d]$, which should, ideally, be negligible.

3138

Yes

Whether the frequency response beyond the band $[c, d]$ is OK?

No

3140

C

D

THIS PAGE BLANK (USPTO)

(f)

C

The design is finished and the discrete time version of the designed nonlinear system is 3142

$$y(k) = \sum_{n=N_0}^N \sum_{l_1, \dots, l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i)$$

D

Design a conventional linear band pass filter $H(q^{-1})$ to attenuate the responses over the frequency bands which are beyond $[c, d]$.

3144

Complete the design by constructing a nonlinear filter the discrete time version of which is

$$y(k) = H(q^{-1}) \sum_{n=N_0}^N \sum_{l_1, \dots, l_n=1}^{K_n} c_{0n}(l_1, \dots, l_n) \prod_{i=1}^n u(k-l_i)$$

3146

End

THIS PAGE BLANK (USPTO)

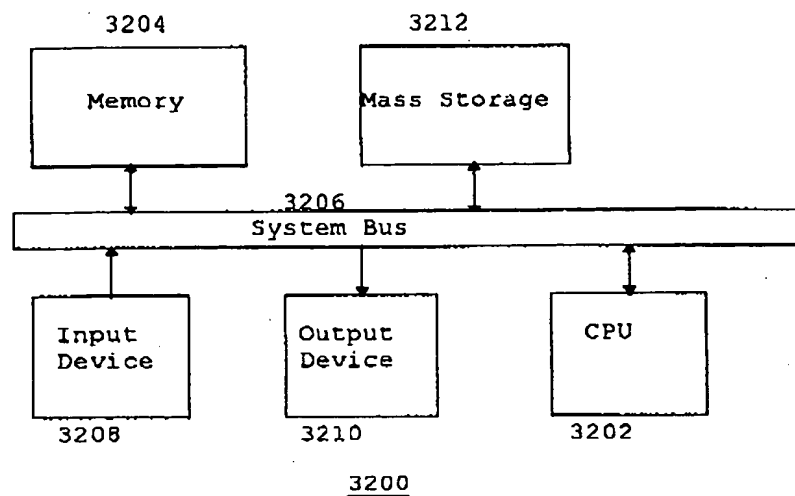


Figure 32 The data processing system on which embodiments of the present invention can be implemented

PCT / GB 99/00 550

3/3/99.

THIS PAGE BLANK (USPTO)

Dibb Lupton A/Sy2